

Bearingless encoders

**Incremental, large hollow shaft
zero pulse, magnetic**

RLI500 (hollow shaft)

Push-pull / RS422



Thanks to its installation depth of min. 10 mm, the bearingless magnetic rotary encoder RLI500, comprising a magnetic ring and sensor head, is ideally suited for plants and machinery where space is very tight. The non-contact measuring principle allows for error-free use even under harsh environmental conditions, as well as ensuring a long service life. In contrast to our measuring system RLI200, a single zero pulse is also implemented here.

IP68 / IP69k protection, special encapsulation technology and tested resistance to cyclic humidity and damp heat offer the highest levels of reliability, even in exposed outdoor use.

This bearingless encoder can be mounted on shafts with a diameter up to max. 350 mm.



High rotational speed



High protection level



Shock / vibration resistant



Reverse polarity protection

Hard-wearing and robust

- High shock and vibration resistance.
- Sturdy housing with IP67 protection. Option: special housing for maximum resistance against condensation (IP68 / IP69k, resistance to cyclic humidity acc. to EN 60068-3-38 as well as damp heat acc. to EN 60068-3-78).
- Non-contact measuring system, free from wear, ensures a long service life.

Fast start-up

- Function display via LED.
- Large mounting tolerance between magnetic band and sensor head.
- Requires very little installation space.
- Slotted hole fixing ensures simple alignment.

Bearingless encoders

**Order code
RLI500**

8.RLI500 . XX1XX . XXXXX . 0700
Type a b c d e f

a Magnetic ring mounting method

- 1 = Press fit ¹⁾
- 2 = Hub screw
- 3 = Screwed flange ¹⁾

b Model

- 1 = IP67, standard
- 2 = IP68 / IP69k and humidity tested acc. to EN 60068-3-38, EN 60068-3-78

c Output circuit / Power supply

- 1 = RS422 / 4.8 ... 26 V DC
- 2 = Push-pull / 4.8 ... 30 V DC

d Type of connection

- 1 = radial cable, 2 m [6.56'] PUR
- A = radial cable, special length PUR *)

*) Available special lengths (connection type A):
3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.RLI500.2112A.04096.0700.0030 (for cable length 3 m)

e Pulses per revolution

- 2048, 3200, 4096, 6400 (for hollow shaft ø 70 mm)
(e.g.: 2048 pulses => 02048)

f Hollow shaft diameter

- 0700 = 70 mm [2.76"] ²⁾

Optional on request

- other pulse rates
- other hollow shaft diameter (up to max. 350 mm)

Press fit



Hub screw



Screwed flange



1) On request.

2) With magnetic ring mounting method 1 or 3 on request.

Bearingless encoders

Incremental, large hollow shaft zero pulse, magnetic	RLI500 (hollow shaft)	Push-pull / RS422
---	------------------------------	--------------------------

Accessories / Display type 572		Order no.
Position display, 6-digit	with 4 fast switch outputs and serial interface	6.572.0116.D05
	with 4 fast switch outputs and serial interface and scalable analog output	6.572.0116.D95
Position display, 8-digit	with 4 fast switch outputs and serial interface	6.572.0118.D05
	with 4 fast switch outputs and serial interface and scalable analog output	6.572.0118.D95

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology

Technical data

Mechanical characteristics		
Maximum speed		12000 min ⁻¹
Protection	model 1	IP67 acc. to EN 60529
	model 2	IP68 / IP69k acc. to EN 60529, DIN 40050-9 and humidity tested acc. to EN 60068-3-38, EN 60068-3-78
Working temperature		-20°C ... +80°C [-4°F ... +176°F]
Shock resistance		5000 m/s ² , 1 ms
Vibration resistance		300 m/s ² , 10 ... 2000 Hz
Pole gap		5 mm from pole to pole
Housing (sensor head)		aluminum
Cable		2 m [6.56'] long, PUR 8 x 0.14 mm ² [AWG 26], shielded, may be used in trailing cable installations
Status LED	green	pulse index
	red	error; speed too high or magnetic fields too weak
CE compliant acc. to		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Electrical characteristics				
Output circuit	RS422		Push-pull	
Power supply	4.8 ... 26 V DC		4.8 ... 30 V DC	
Power consumption (no load)	typ. 25 mA max. 60 mA		typ. 25 mA max. 60 mA	
Permissible load/channel	120 ohm		+/- 20 mA	
Min. pulse edge interval	1 µs		1 µs	
Signal level	HIGH LOW	min. 2.5 V max. 0.5 V	min. +V - 2.0 V max. 0.5 V	
Reference signal	1 x per revolution			
System accuracy	typ. 0.3° with shaft tolerance g6			
Pulse rate [ppr] ¹⁾	2048	3200	4096	6400
max. speed min ⁻¹	7300	4600	3600	2300

Terminal assignment

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)									
1, 2	1, A	Signal:	0 V	+V	A	\bar{A}	B	\bar{B}	0	$\bar{0}$	\perp
		Cable color:	WH	BN	GN	YE	GY	PK	BU	RD	shield ²⁾

+V: Encoder power supply +V DC
0 V: Encoder power supply ground GND (0 V)
A, \bar{A} : Incremental output channel A / sine signal
B, \bar{B} : Incremental output channel B / cosine signal
0, $\bar{0}$: Reference signal
 \perp : Plug connector housing (shield)

1) With an input frequency of the evaluation unit of 250 kHz.
2) Shield is attached to connector housing.

Bearingless encoders


**Incremental, large hollow shaft
zero pulse, magnetic**

RLI500 (hollow shaft)

Push-pull / RS422

Mounting orientation and permissible mounting tolerances

Distances



- 1 Distance sensor head / magnetic ring:
0.1 ... 1.5 [0.004 ... 0.06]
(1 [0.04] recommended)

Impulsions par tour	A for distance sensor head / magnetic ring = 1 mm [0.04]
2048, 3200, 4096, 6400	128.0 [5.04]

Torsion



Offset



Tilting




Warning: When mounting the sensor head, please ensure its correct orientation to the magnetic ring!


Dimensions

Dimensions in mm [inch]

Sensor head

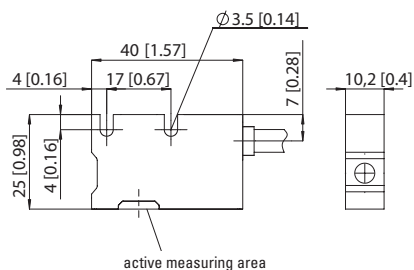

Magnetic ring (hub screw) pulse rate 2048, 3200, 4096, 6400

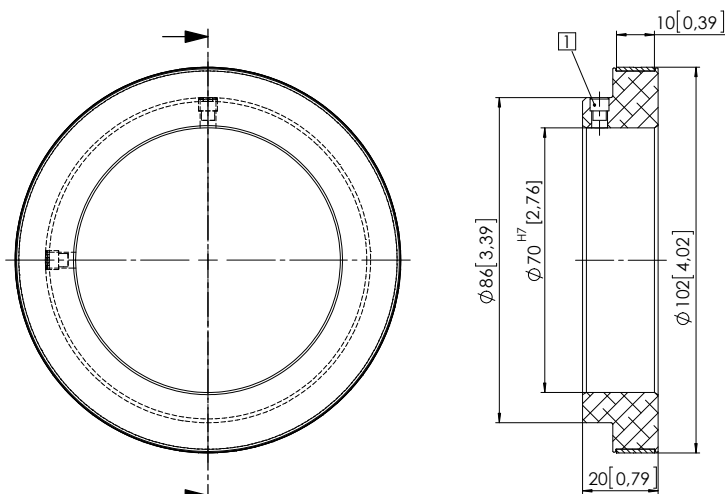

- 1 M5 set screw M4