

WITTENSTEIN motion control

New
3-Stage High Torque model TPMA 025-110



TPM

Servo actuators - Setting new
standards in dynamics, precision
and compactness



6



10



Overview WITTENSTEIN group

4 - 5

TPM product features, applications

6 - 9

Design properties & features

TPM series 004 - 110

10 - 29

Technical data, characteristic curves and drawings

TPMA series 025 - 110

30 - 41

Technical data, characteristic curves and drawings

Options and accessories

42 - 44

Brake, temperature sensors, feedback systems, cables

Servo controllers, plug connections

45 - 46

Ordering codes

47

Overview - WITTENSTEIN group



WITTENSTEIN AG

The **WITTENSTEIN AG**, with its 750 employees worldwide, develops, produces and distributes high-precision planetary gears, entire electro-mechanical drive systems, as well as AC servo systems and motors, amongst other products. Areas of application include industrial robots, machine tools and packaging machines, paper and printing machines, elevators, the Formula 1, as well as the aerospace industry.

Technological competence and ongoing innovation ensure the success of the **WITTENSTEIN AG**. Creative and motivated employees are the basis of the company's acclaim. In the past two fiscal years, more than 200 new employees have joined the company. The turnover yielded by products that are less than 5 years old amounts to approx. 85 percent. Every tenth Euro is invested in research and development, more than 12 percent of the employees work in these fields.



Technical solutions: Customer benefit in the foreground



alpha getriebbau GmbH

Low-backlash servo gears, planetary windlasses with integrated servo drives, as well as the servo design software cymex®.



WITTENSTEIN

motion control GmbH

Integrated electro-mechanical, rotative and linear servo systems. Intelligent units with the highest precision and dynamics.



WITTENSTEIN

cyber motor GmbH

Development and distribution of mini AC servomotors for industrial applications.
Characteristics: Highest power density and reliability.



Company premises in Igelsheim/Harthausen: Inspiration for innovation



750 motivated employees: Enthusiasm and emotion



WITTENSTEIN intens GmbH

Development, manufacture, sale and distribution of intelligent, innovative implants for orthopedic and accident surgery.



WITTENSTEIN bastian GmbH

Development, manufacture, sales and distribution of innovative gear technology.
Implemented in, for example, the Formula 1 and the aerospace industry.




WITTENSTEIN aerospace & simulation GmbH

Development, manufacture, sales and distribution of electro-mechanical control systems, active control units for aeronautical applications and haptic systems with force feedback for simulators.

Product features

With the TPM and TPMA AC servo actuators, the **WITTENSTEIN motion control** GmbH is providing the drive technology market with products that set new standards in precision, dynamics, power density and compactness.

Resolver feedback is standard. Optional single- or multi-turn absolute feedbacks with EnDat® (Heidenhain) or Hiperface® (Stegmann) interfaces available.

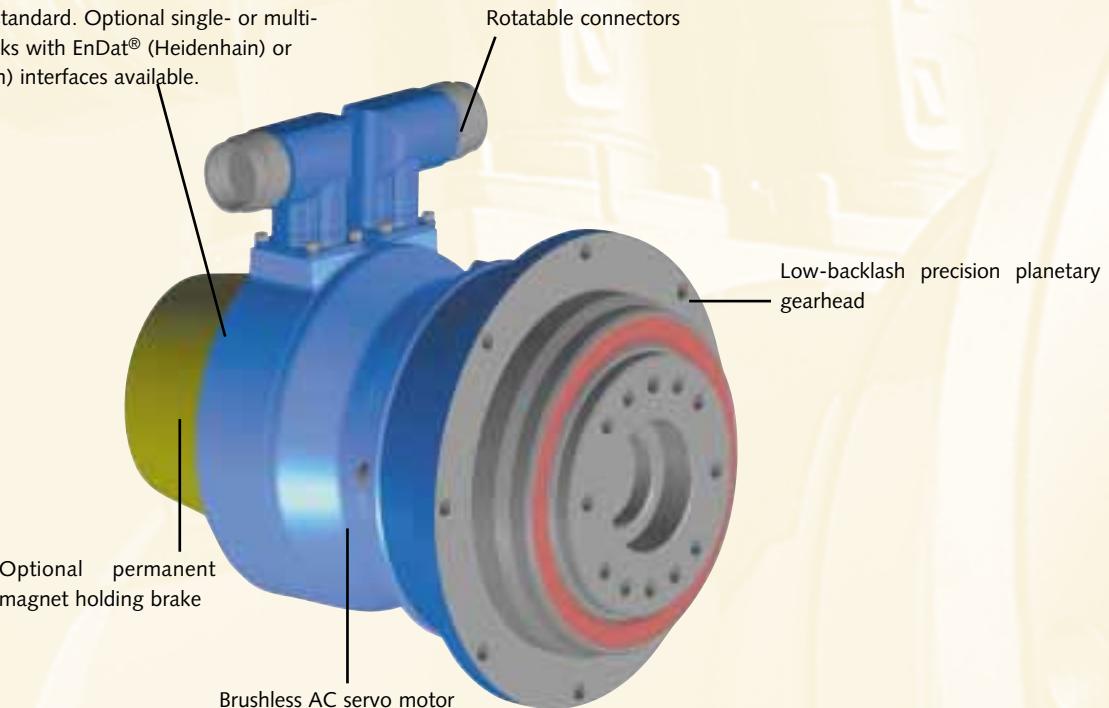

TPM 004 up to 40 Nm

TPM 010 up to 100 Nm

TPM 025 up to 300 Nm


TPMA 025 High Torque up to 480 Nm

TPM 050 up to 650 Nm

TPMA 050 High Torque up to 950 Nm

TPM 110 up to 1600 Nm

TPMA 110 High Torque up to 2600 Nm

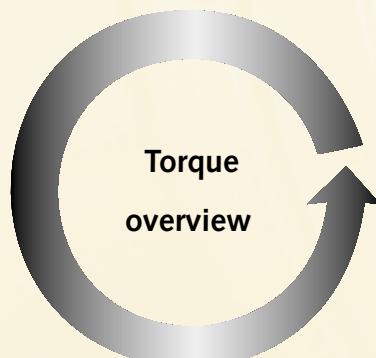



Product features

High dynamic performance

An integral brushless AC servomotor was designed to work with the alpha planetary gearheads to provide a high torque-to-inertia ratio, optimized for high dynamic performance. Connecting the motor to the gearhead without a coupling improves the stiffness of the unit while reducing the moment of inertia by approximately 40% compared to customary motor/gearhead units.

High power density

A high pole count motor optimizes use of the magnetic material and yields the most power in the smallest package. In the new 3-stage TPMA version, the torque range has been considerably extended while maintaining the same compact design.

Compact design/reduced weight

Integrating the servomotor and gearhead into one package sets new standards for reduced size and weight. It is approximately 62% shorter and weights much less than a traditional motor/gearhead combination of comparable power. This is especially important for applications where mounting space is limited or where the motor itself is part of the moving load, e.g. robotics and gantries.

High positioning accuracy/efficiency

Directly mounting the drive elements to the output flange reduces overall size and provides high torsional rigidity and short settling times. The pinion is integrated directly into the motor shaft, resulting in a much shorter motor-to-pinion distance. This design results in much higher positioning accuracy - <1 arc minute of backlash - and higher dynamics, for shorter cycle times and reduced production costs for the customer application. In addition, the TPM/TPMA feature overall efficiency >85%.

Direct mount/reduced components

The TPM/TPMA can be mounted from either the front or the rear of the mounting flange. The application load mounts directly to the driving flange, eliminating the need for a coupling. Dual tapered roller bearings in the output stage (from size 050) eliminate the need for additional support bearings in the customer application. In addition, two swiveling connectors allow for easy cable routing.

Maintenance free

High quality synthetic lubricants provide lubrication for the service life of the product.

Smooth motion and quiet operation

The TPMs are characterized by low torque ripple for extremely smooth operation. They feature low noise levels of less than 65 dB(A).

Simple integration

The TPM can be operated with most of the brushless servo controllers on the market. Preassembled cables and controller-specific start-up instructions simplify installation and start-up.

Optional absolute feedback

An optional single- or multi-turn absolute encoder eliminates the necessity for homing on start-up.

Applications



Yxlon



Six TPM drives on two swivel axes and one rotating axis control an X-ray testing system for cast parts. A move to a new position and an X-ray inspection occur within one second, repeating up to 300 times per part. The rapid positioning and testing procedure requires short settling times, which are achieved because of the low weight, high torsional rigidity and low inertia of the TPM drives.



Unicor

A winding unit without dancer roll forms the terminating unit of an extrusion machine for 2-5 mm wide plastic strips. Constant tension is required for smooth winding of the stripes. The high torsional rigidity and excellent dynamics of the TPM drive enables rapid torque regulation, within an torque-adjustment range of 1:40.



Applications



SIG Robotics

Three TPM drives control the movement of the three axes of this fast pick and place robot, with up to 120 pick and place cycles per minute. The TPM was chosen for this application because of its high dynamic performance, low weight, small overall length and high reliability.



Installed in a plant for dosing liquid products, three TPM drives control the piston dosing pump, a rotary valve and the container-lifting device. Because of its compact design, three TPM drives are incorporated into a 50 cm x 50 cm x 75 cm space.

Gasti

TPM 004 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i			21, 31, 61, 91
Max. acceleration torque ¹⁾	T _{2B}	Nm	i = 31 i = 21, 61, 91	40 32
Emergency Stop torque ²⁾	T _{2Not}	Nm		100
Nominal output torque	T _{2N}	Nm	i = 31 i = 21, 61, 91	25 15
Max. input speed	n _{1Max}	min ⁻¹		7,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹		6,000
Torsional backlash	j _t	arcmin	Standard Reduced	≤ 5 ≤ 3
Torsional rigidity	C _{t21}	Nm/arcmin		6.8
Max. axial force ⁴⁾	F _{2AMax}	N		1,630
Max. tilting torque	M _{2TiltMax}	Nm		91
Tilting rigidity	C _{2K}	Nm/arcmin		85
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm	i = 31 i = 91	0.15 0.08
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 21 i = 31 i = 61 i = 91	0.01 0.01 0.001 0.001

Motor data

			i = 21, 31	i = 61, 91
DC bus voltage	U _D	VDC	320	320
Peak torque ⁶⁾	M _{Max}	Nm	1.70	0.79
Continuous stall torque	M ₀	Nm	0.58	0.31
Nominal torque	M _N	Nm	0.48	0.25
Peak current ⁶⁾	I _{Max}	A	4.20	2.90
Nominal current	I _N	A	1.30	1.00
No-load speed ⁶⁾	n ₀	min ⁻¹	9,100	13,500
Nominal speed ⁶⁾	n _N	min ⁻¹	7,625	11,100
Max. power	P _{Max}	kW	0.92	0.58
Moment of inertia with resolver	J _{Mot.}	kgcm ²	0.16	0.09

General data

Protection class		IP64
Permissible transmission temperature	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	2.6/3.0 at i = 21/31 2.4/2.7 at i = 61/91
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour

2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature


4) Based on the flange center

5) At 20°C gearhead temperature


6) Limit motor values to maximum values of the gearhead




The maximum and nominal values of the gearbox can limit the output values in some circumstances.

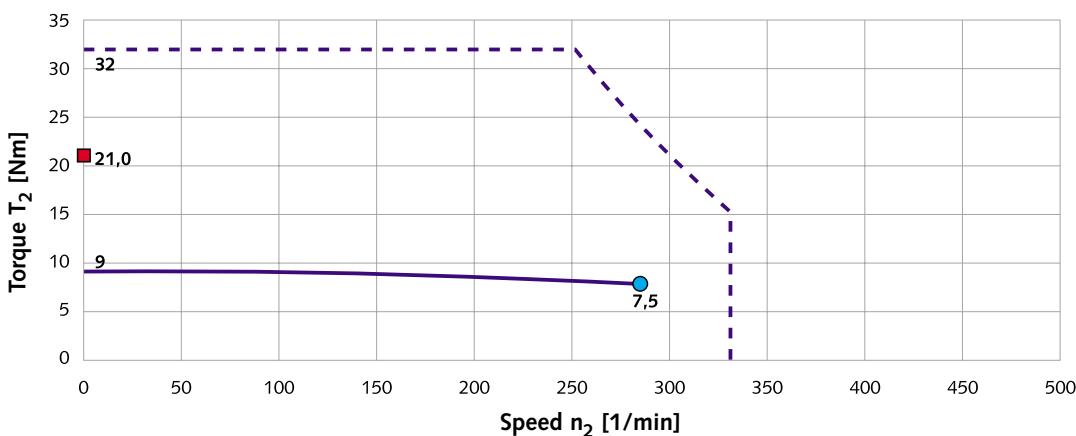


$i = 21$

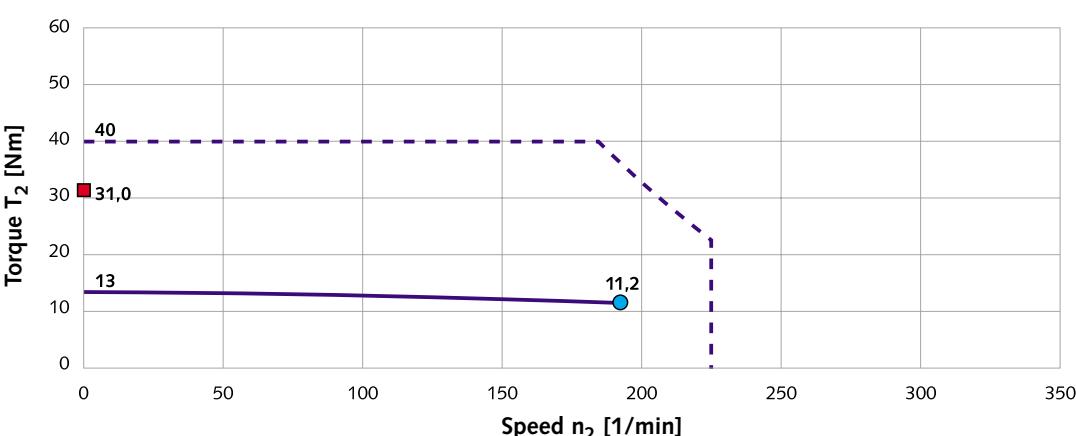

$i = 31$

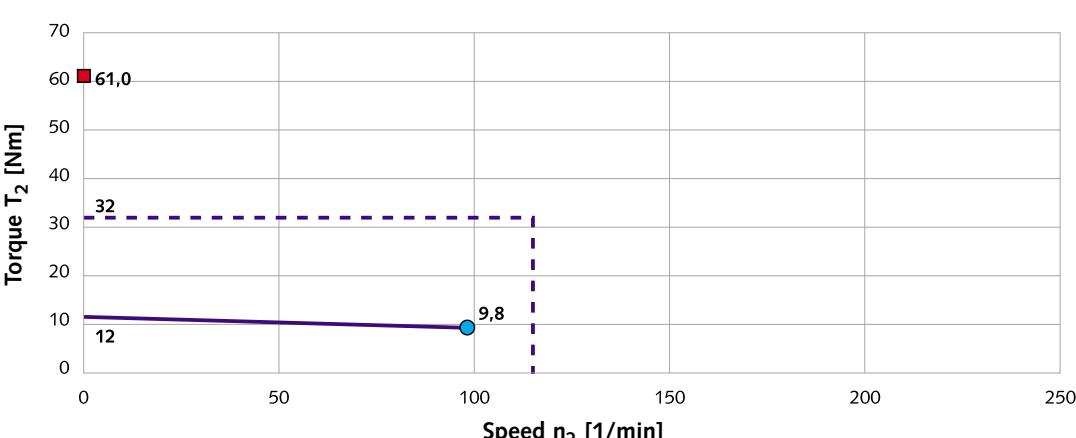


$i = 61$

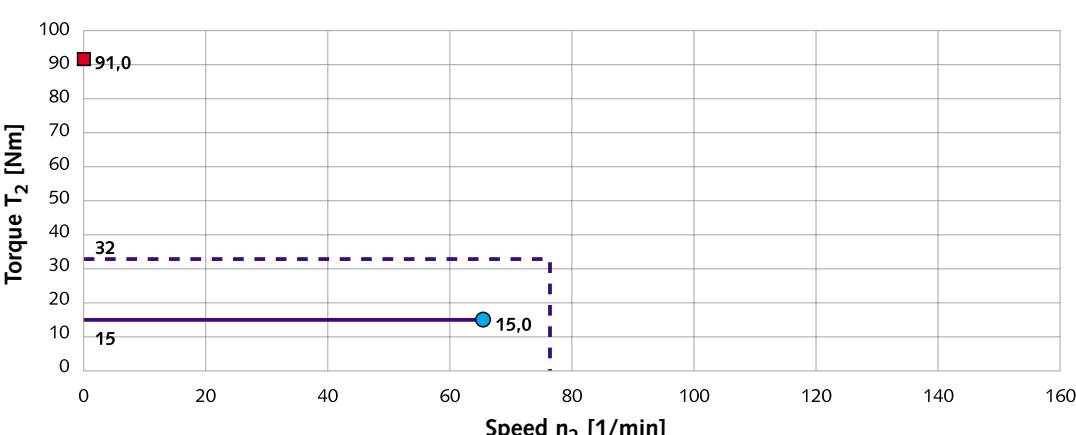


$i = 91$

- - - Max. output torque 320V DC
- - - Max. output torque 600V DC
- Nominal torque 320V DC
- Nominal torque 600V DC
- Holding torque: brake
- Nominal point 320V DC

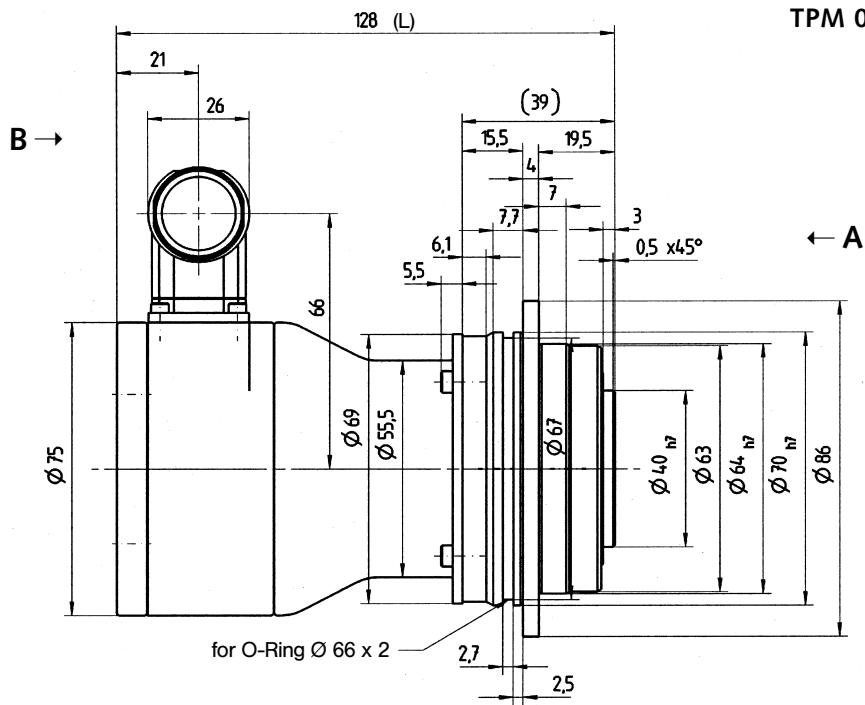


View A

Flange according to
ISO9409 with additional
thread

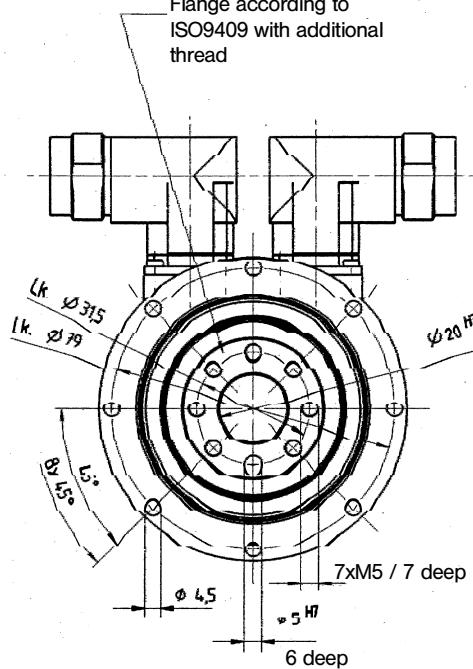

Standard version with resolver **with** brake
at $i = 21/31$

TPM 004-...R-...BP-030

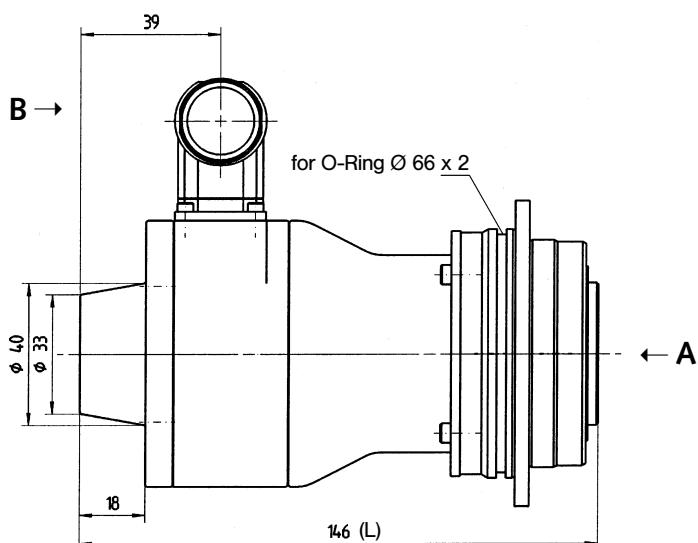


You can obtain all DXF files and 3D models for all versions at www.w-m-c.de

Standard version with resolver **without**

brake at i = 61/91


TPM 004-...R-....-OH.-015

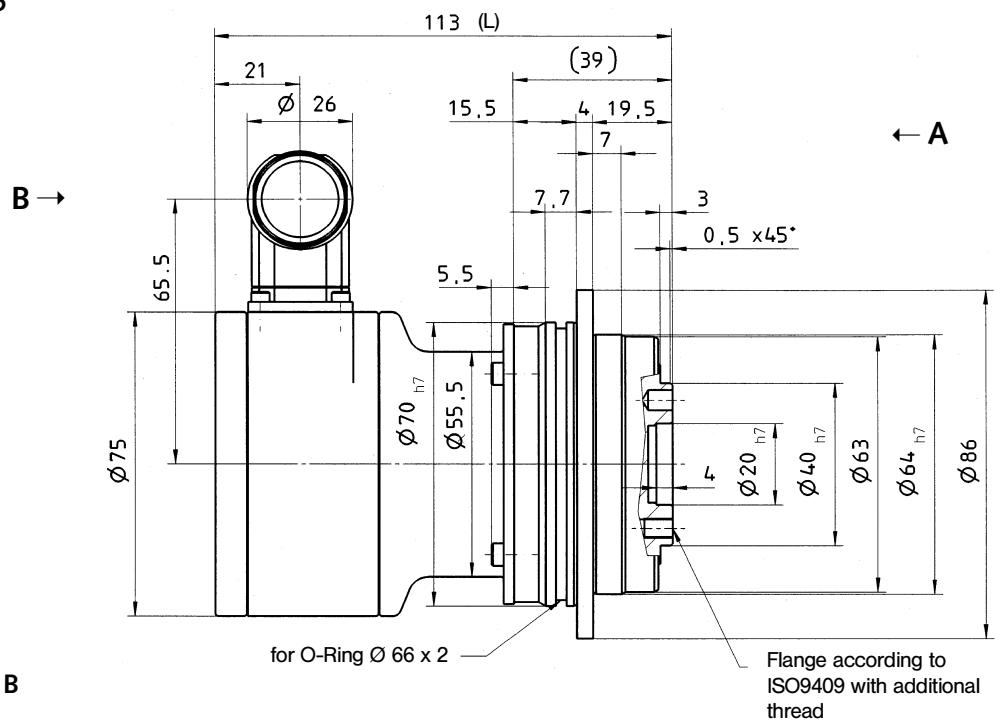

View B

Signal connector
(rotatable) 

Power connector
(rotatable)

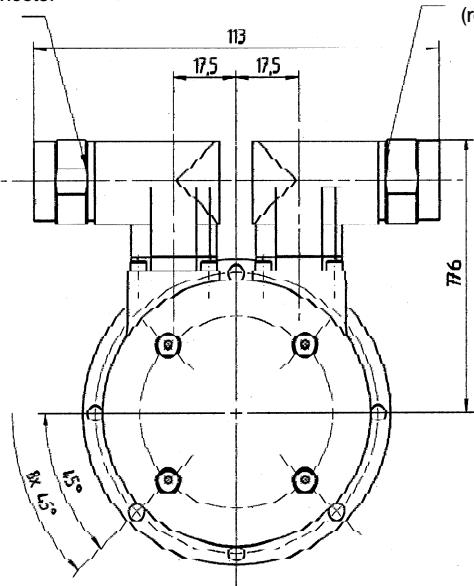


Total length L for other options

TPM 004, i = 61, 91	Without brake	With brake
Heidenhain motor encoder	-	-
Stegmann motor encoder	142	185

Standard version with resolver **with**
brake at $i = 61/91$

TPM 004-...R-....BP.-015

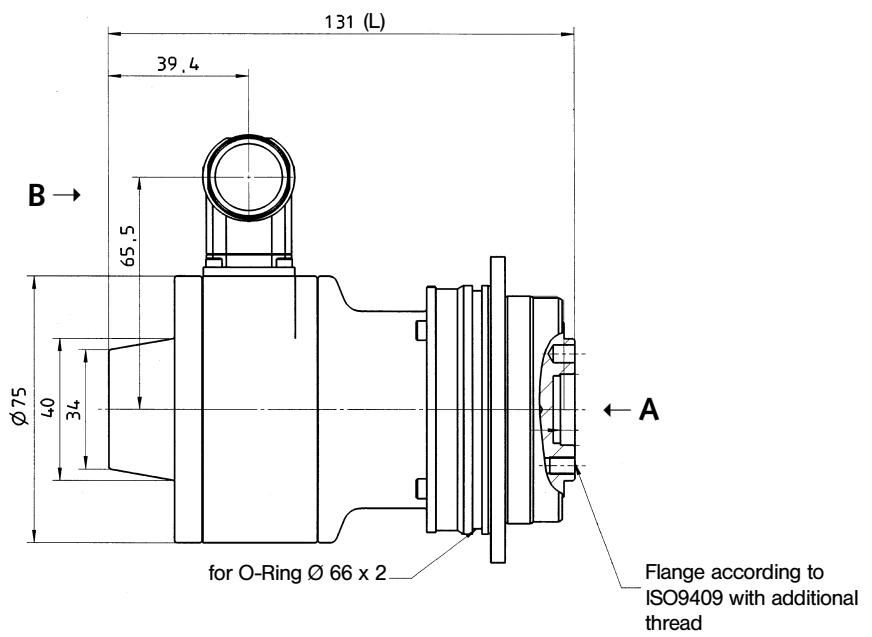



TPM 010 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i				21, 31, 61, 91
Max. acceleration torque ¹⁾	T _{2B}	Nm	i = 31 i = 21, 61, 91		100 80
Emergency Stop torque ²⁾	T _{2Not}	Nm			250
Nominal output torque	T _{2N}	Nm	i = 31 i = 21, 61, 91		50 35
Max. input speed	n _{1Max}	min ⁻¹			7,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹			6,450
Torsional backlash	j _t	arcmin	Standard Reduced		≤ 3 ≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin			21
Max. axial force ⁴⁾	F _{2AMax}	N			2,150
Max. tilting torque	M _{2TiltMax}	Nm			235
Tilting rigidity	C _{2K}	Nm/arcmin			225
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm	i = 31 i = 91		0.3 0.2
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 21 i = 31 i = 61 i = 91		0.04 0.03 0.01 0.01

Motor data

			i = 21, 31		i = 61, 91	
DC bus voltage	U _D	VDC	320	600	320	600
Peak torque ⁶⁾	M _{max}	Nm	3.60	3.30	1.70	1.70
Continuous stall torque	M ₀	Nm	1.10	1.10	0.60	0.60
Nominal torque	M _N	Nm	0.94	0.84	0.52	0.51
Peak current ⁶⁾	I _{Max}	A	7.30	5.00	4.50	3.00
Nominal current	I _N	A	1.50	1.10	1.10	0.70
No-load speed ⁶⁾	n ₀	min ⁻¹	5,800	7,800	7,000	7,700
Nominal speed ⁶⁾	n _N	min ⁻¹	4,875	6,775	5,900	6,550
Max. power	P _{Max}	kW	1.22	1.66	0.75	0.85
Moment of inertia with resolver	J _{Mot}	kgcm ²	0.37		0.21	

General data

Protection class		IP64
Permissible transmission temperature	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	4.9/5.3 at i = 21/31 4.4/4.9 at i = 61/91
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour

2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature

4) Based on the flange center

5) At 20°C gearhead temperature

6) Limit motor values to maximum values of the gearhead



TPM 010 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i				21, 31, 61, 91
Max. acceleration torque ¹⁾	T _{2B}	Nm	i = 31 i = 21, 61, 91		100 80
Emergency Stop torque ²⁾	T _{2Not}	Nm			250
Nominal output torque	T _{2N}	Nm	i = 31 i = 21, 61, 91		50 35
Max. input speed	n _{1Max}	min ⁻¹			7,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹			6,450
Torsional backlash	j _t	arcmin	Standard Reduced		≤ 3 ≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin			21
Max. axial force ⁴⁾	F _{2AMax}	N			2,150
Max. tilting torque	M _{2TiltMax}	Nm			235
Tilting rigidity	C _{2K}	Nm/arcmin			225
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm	i = 31 i = 91		0.3 0.2
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 21 i = 31 i = 61 i = 91		0.04 0.03 0.01 0.01

Motor data

			i = 21, 31		i = 61, 91	
DC bus voltage	U _D	VDC	320	600	320	600
Peak torque ⁶⁾	M _{max}	Nm	3.60	3.30	1.70	1.70
Continuous stall torque	M ₀	Nm	1.10	1.10	0.60	0.60
Nominal torque	M _N	Nm	0.94	0.84	0.52	0.51
Peak current ⁶⁾	I _{Max}	A	7.30	5.00	4.50	3.00
Nominal current	I _N	A	1.50	1.10	1.10	0.70
No-load speed ⁶⁾	n ₀	min ⁻¹	5,800	7,800	7,000	7,700
Nominal speed ⁶⁾	n _N	min ⁻¹	4,875	6,775	5,900	6,550
Max. power	P _{Max}	kW	1.22	1.66	0.75	0.85
Moment of inertia with resolver	J _{Mot}	kgcm ²	0.37		0.21	

General data

Protection class		IP64
Permissible transmission temperature	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	4.9/5.3 at i = 21/31 4.4/4.9 at i = 61/91
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour


2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature


4) Based on the flange center

5) At 20°C gearhead temperature

6) Limit motor values to maximum values of the gearhead


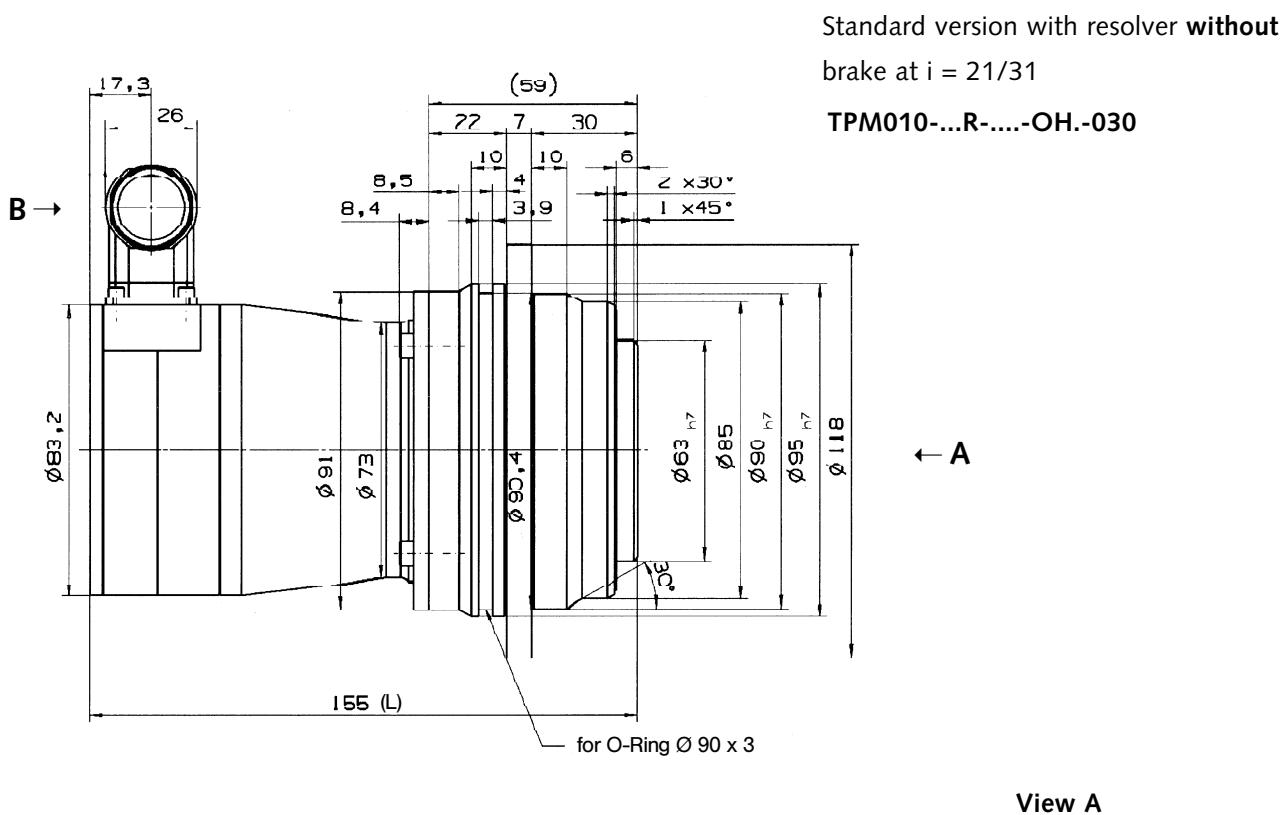

Total length L for other options

TPM 010, $i = 21, 31$	Without brake	With brake
Heidenhain motor encoder	206.4	242.4
Stegmann motor encoder	184	219.5

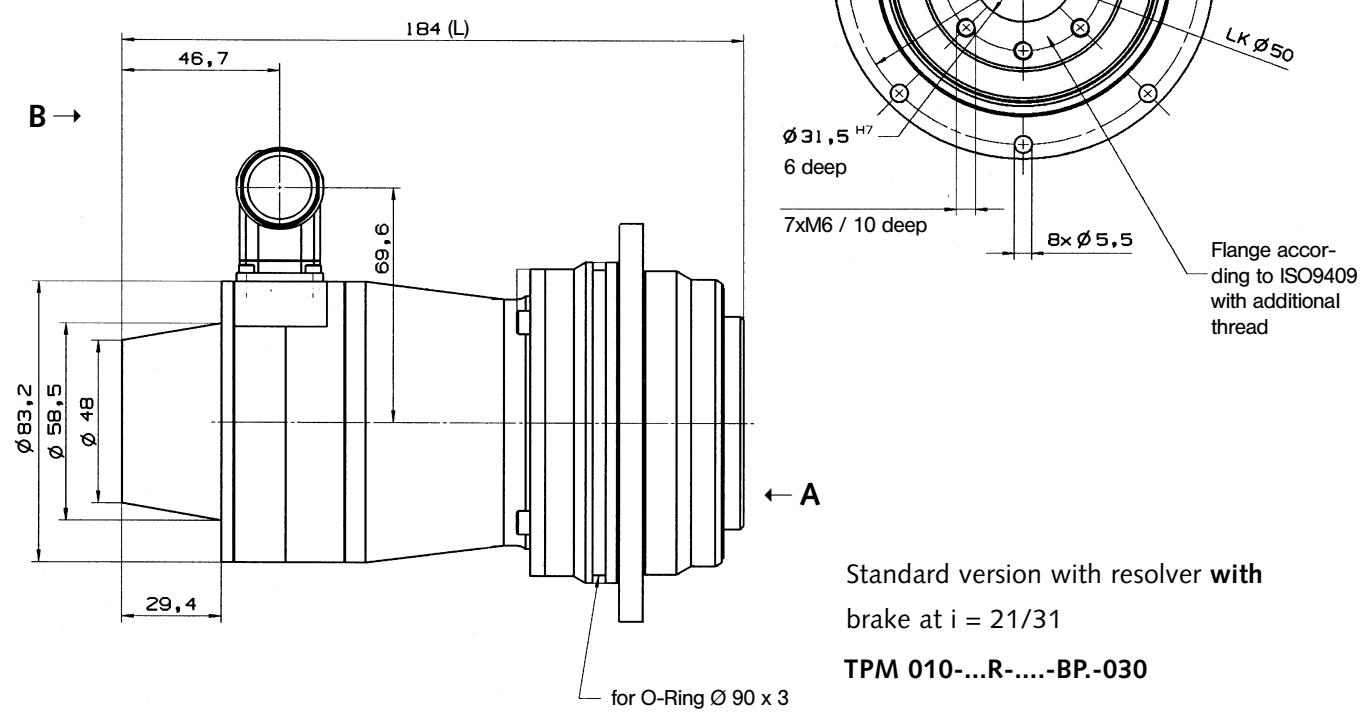


Standard version with resolver **without**
brake at i=61/91

TPM010-...R-....-OH.-015

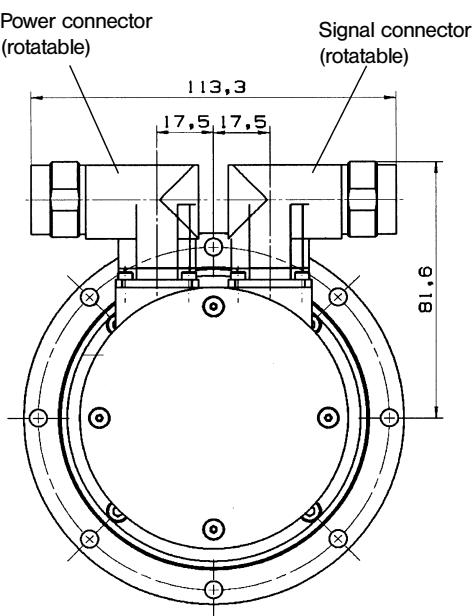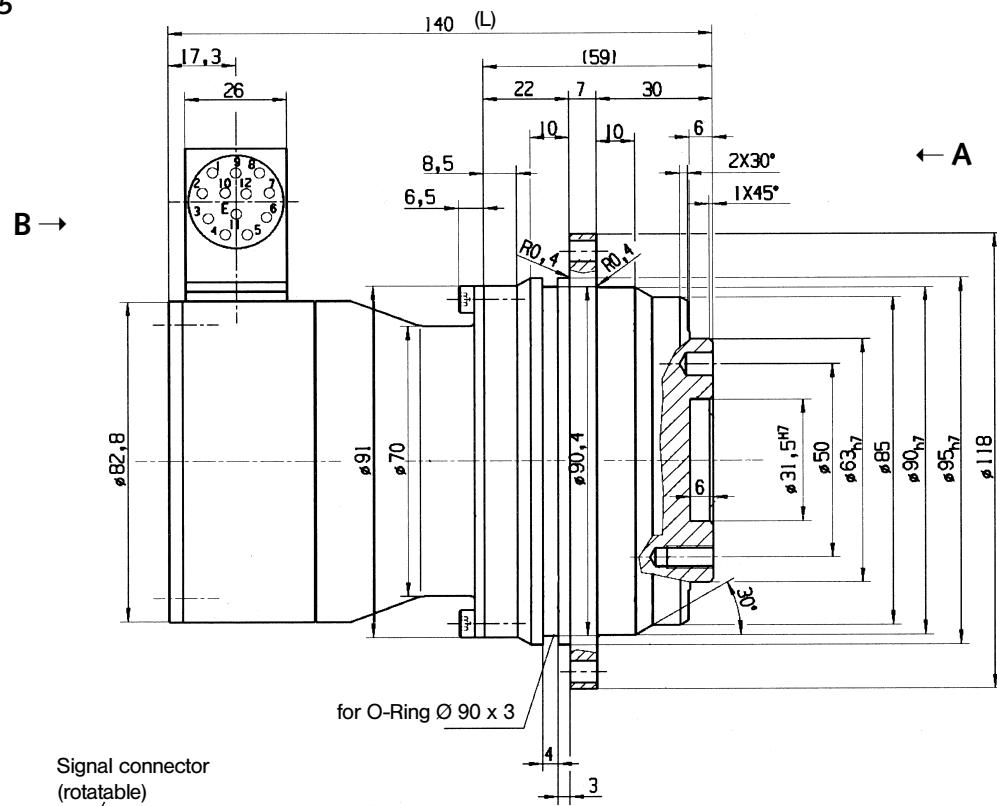

Total length L for other options		
TPM 010, i = 61, 91	Without brake	With brake
Heidenhain motor encoder	191	229
Stegmann motor encoder	170	204.9

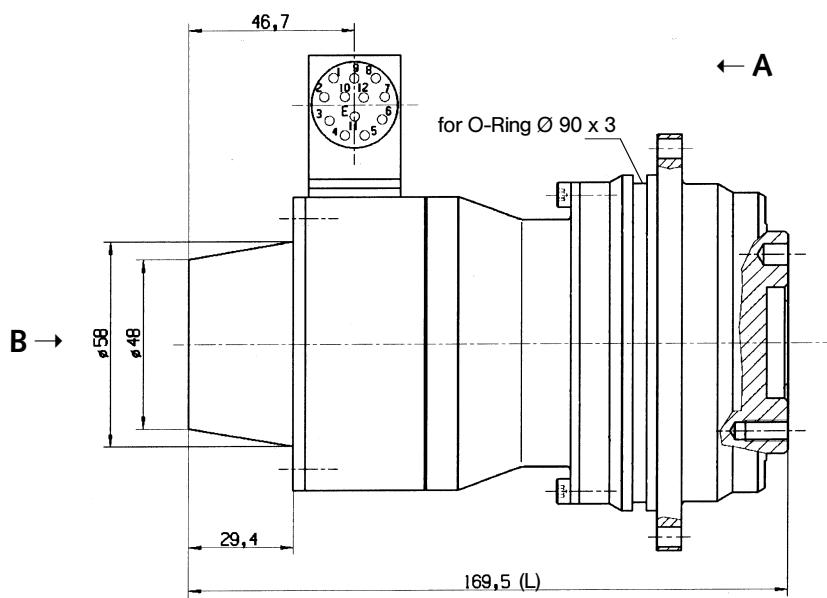

Standard version with resolver **with**
brake at $i=61/91$

TPM 010-...R-....-BP.-015



TPM 025 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i				21, 31, 61, 91
Max. acceleration torque ¹⁾	T _{2B}	Nm	i = 31 i = 21, 61, 91	300 250	
Emergency Stop torque ²⁾	T _{2Not}	Nm			625
Nominal output torque	T _{2N}	Nm	i = 31 i = 21, 61, 91	170 100	
Max. input speed	n _{1Max}	min ⁻¹			6,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹			5,900
Torsional backlash	j _t	arcmin	Standard reduziert	≤ 3 ≤ 1	
Torsional rigidity	C ₂₁	Nm/arcmin			56
Max. axial force ⁴⁾	F _{2AMax}	N			4,150
Max. tilting torque	M _{2TiltMax}	Nm			413
Tilting rigidity	C _{2K}	Nm/arcmin			550
No-load running torque (n ₁ = 3000 min ⁻¹)	T ₀₁₂	Nm	i = 31 i = 91	0.6 0.3	
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 21 i = 31 i = 61 i = 91	0.10 0.06 0.01 0.01	

Motor data

			i = 21, 31		i = 61, 91	
DC bus voltage	U _D	VDC	320	600	320	600
Peak torque ⁶⁾	M _{max}	Nm	11.70	12.40	4.20	4.20
Continuous stall torque	M ₀	Nm	5.00	5.00	1.70	1.70
Nominal torque	M _N	Nm	3.30	3.40	1.40	1.30
Peak current ⁶⁾	I _{Max}	A	25.00	10.60	10.80	7.00
Nominal current	I _N	A	6.00	3.40	3.10	1.80
No-load speed ⁶⁾	n ₀	min ⁻¹	6,380	6,000	7,300	7,800
Nominal speed ⁶⁾	n _N	min ⁻¹	5,200	4,838	5,625	6,200
Max. power	P _{Max}	kW	4.04	4.22	1.72	1.85
Moment of inertia with resolver	J _{Mot.}	kgcm ²	2.39		0.86	

General data

Protection class		IP64
Permissible transmission temperature	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	9.0/9.8 at i = 21/31 7.6/8.4 at i = 61/91
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour

2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature


4) Based on the flange center


5) At 20°C gearhead temperature

6) Limit motor values to maximum values of the gearhead



The maximum and nominal values of the gearbox can limit the output values in some circumstances.

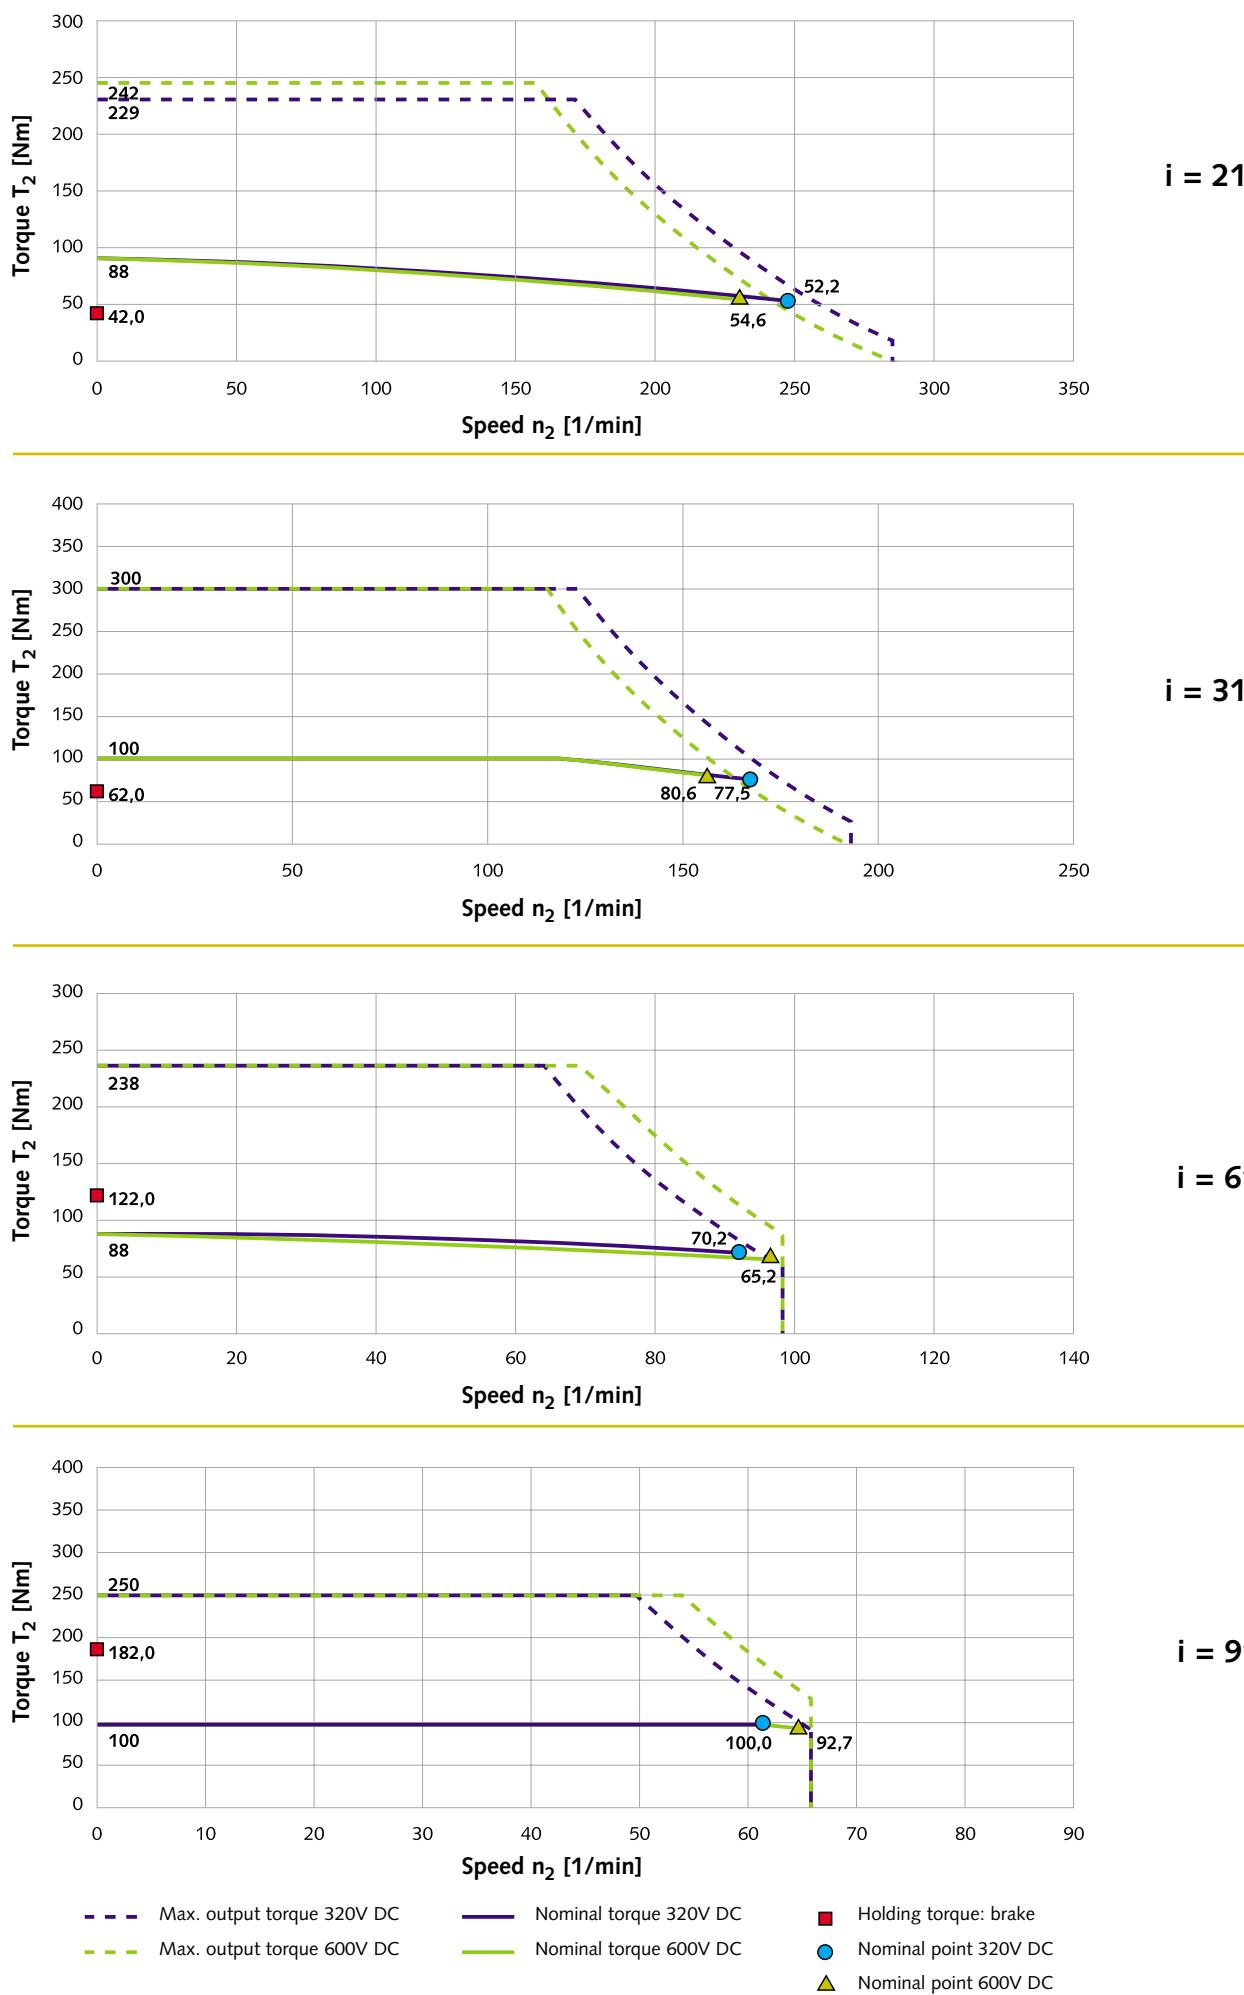


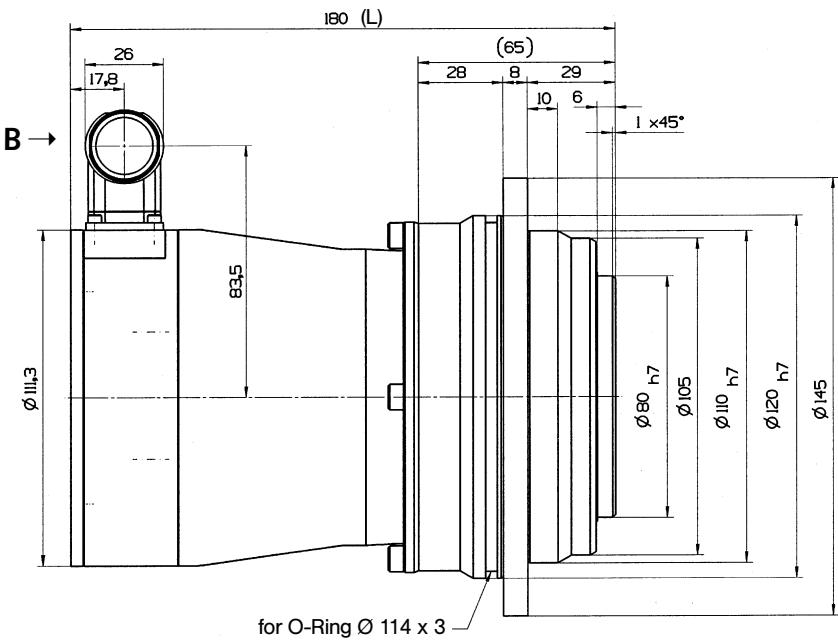


Standard version with resolver **without**
brake at $i = 21/31$

TPM 025...R....OH.-045

View A

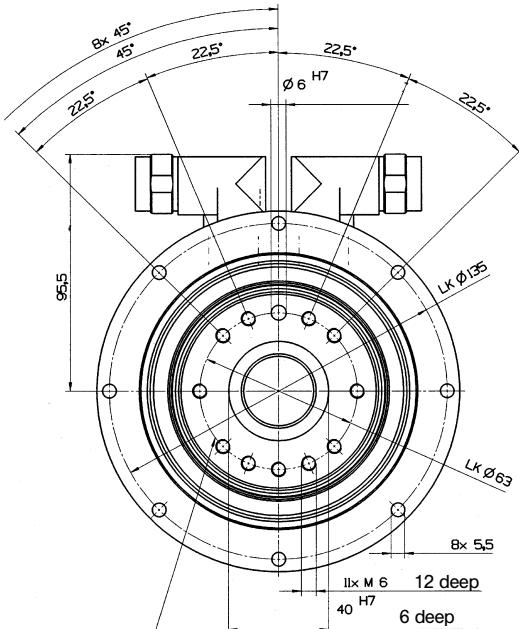

Flange according to ISO9409 with
additional thread

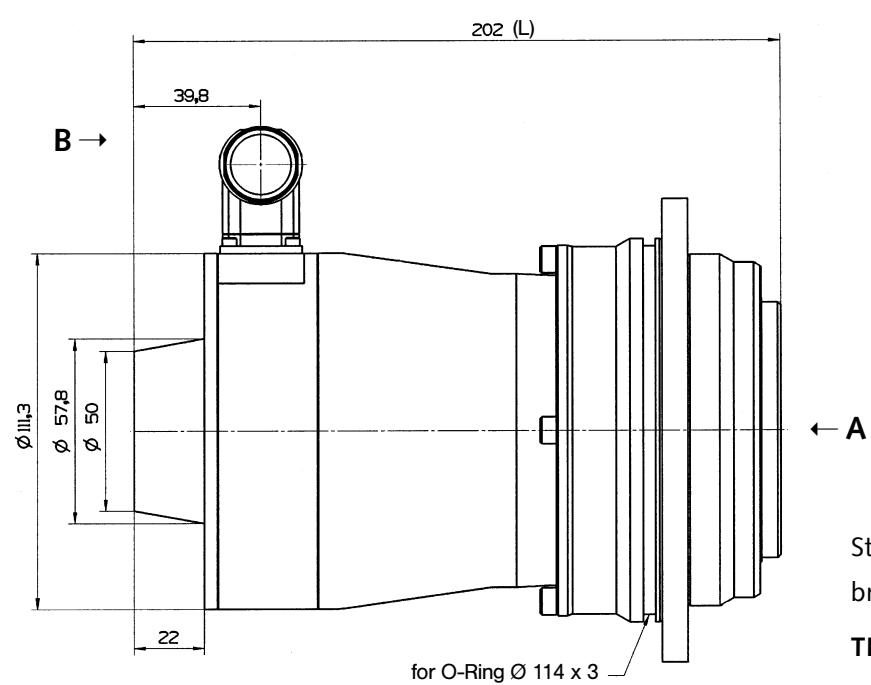


Standard version with resolver **with**
brake at $i = 21/31$

TPM 025...R....BP.-045




Standard version with resolver **without**
brake at i=61/91

TPM 025-...R-....-OH.-015

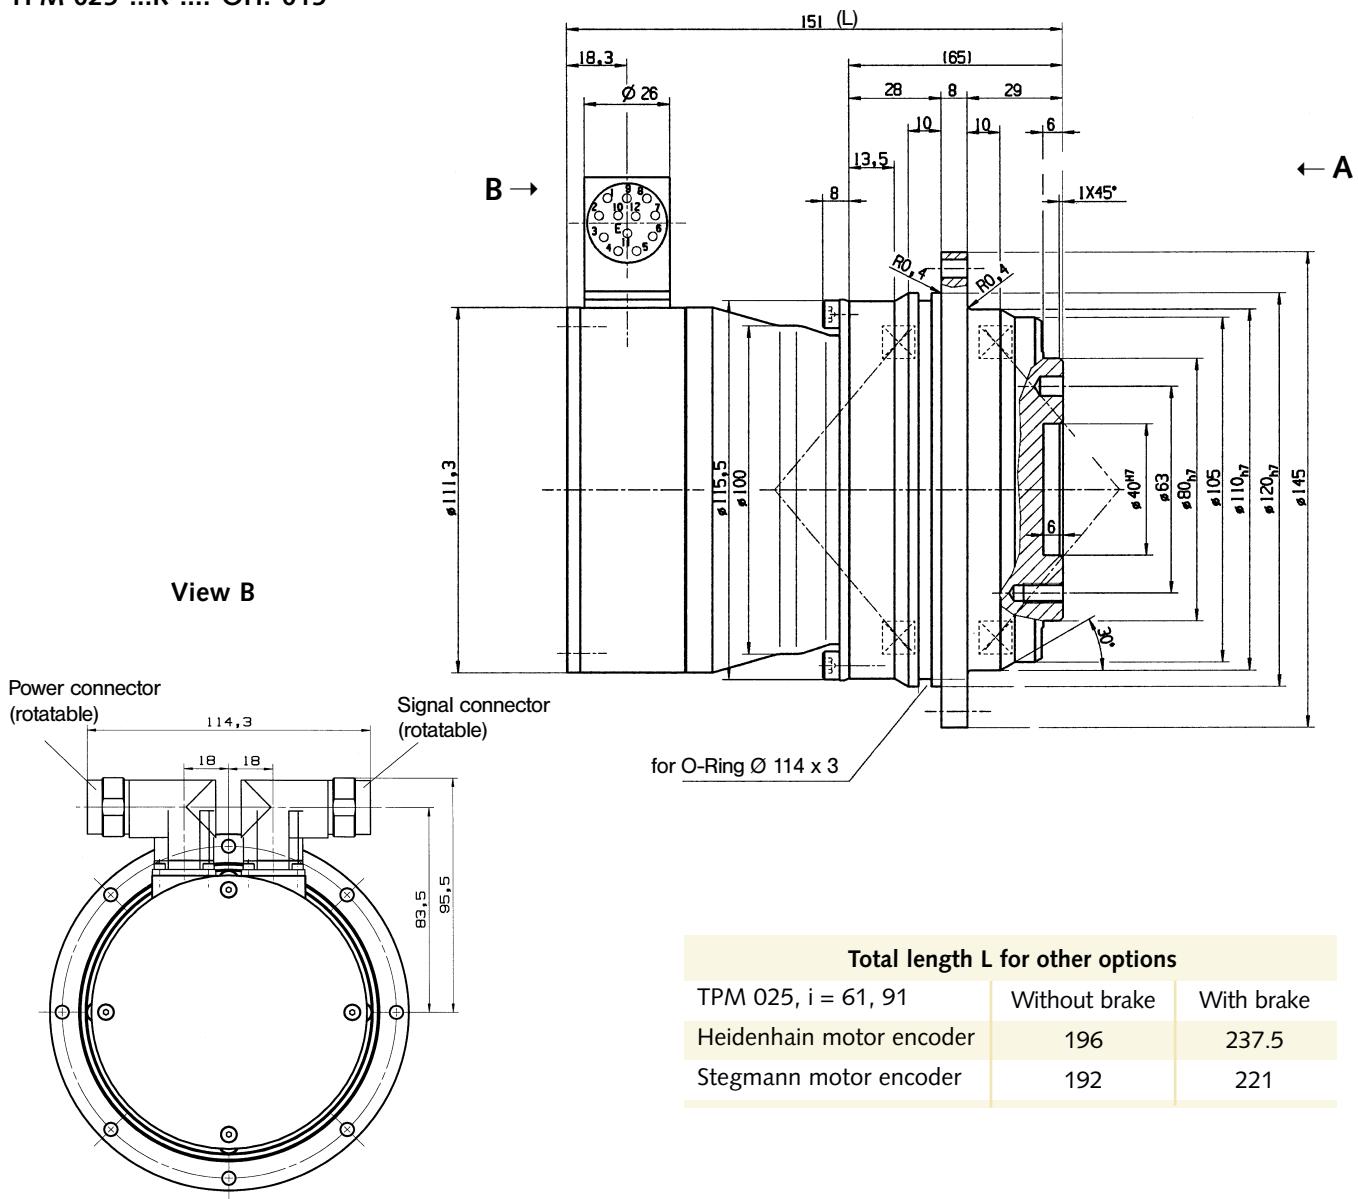

Total length L for other options

TPM 025, i = 61, 91	Without brake	With brake
Heidenhain motor encoder	196	237.5
Stegmann motor encoder	192	221

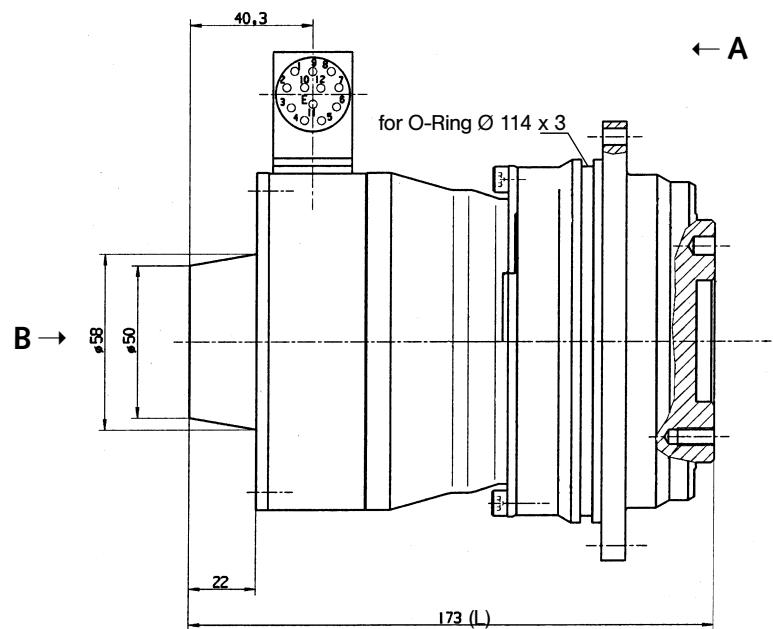

Standard version with resolver **with**
brake at i=61/91

TPM 025-...R-....-BP.-015



TPM 050 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i				21, 31, 61, 91
Max. acceleration torque ¹⁾	T _{2B}	Nm	i = 31 i = 21, 61, 91		650 500
Emergency Stop torque ²⁾	T _{2Not}	Nm			1,250
Nominal output torque	T _{2N}	Nm	i = 31 i = 21, 61, 91		370 220
Max. input speed	n _{1Max}	min ⁻¹			5,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹			4,650
Torsional backlash	j _t	arcmin	Standard Reduced		≤ 3 ≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin			118
Max. axial force ⁴⁾	F _{2AMax}	N			6,130
Max. tilting torque	M _{2TiltMax}	Nm			1,295
Tilting rigidity	C _{2K}	Nm/arcmin			560
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm	i = 31 i = 91		1.3 1.1
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 21 i = 31 i = 61 i = 91		0.37 0.26 0.06 0.05

Motor data

			i = 21, 31		i = 61, 91	
DC bus voltage	U _D	VDC	320	600	320	600
Peak torque ⁶⁾	M _{Max}	Nm	30.50	32.50	7.80	7.80
Continuous stall torque	M ₀	Nm	13.60	13.60	3.60	3.50
Nominal torque	M _N	Nm	6.60	4.90	2.80	2.50
Peak current ⁶⁾	I _{Max}	A	75.00	54.00	19.60	13.70
Nominal current	I _N	A	12.40	5.60	4.20	2.60
No-load speed ⁶⁾	n ₀	min ⁻¹	6,380	7,180	5,000	5,900
Nominal speed ⁶⁾	n _N	min ⁻¹	5,375	6,000	3,775	4,562
Max. power	P _{Max}	kW	11.18	13.0	2.25	2.53
Moment of inertia with resolver	J _{Mot.}	kgcm ²	9.09		2.28	

General data

Protection class		IP64
Operating temperature range	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blau)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	21.3/23.7 at i = 21/31 15.1/16.2 at i = 61/91
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour

2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature





4) Based on the flange center

5) At 20°C gearhead temperature


6) Limit motor values to maximum values of the gearhead



The maximum and nominal values of the gearbox can limit the output values in some circumstances.

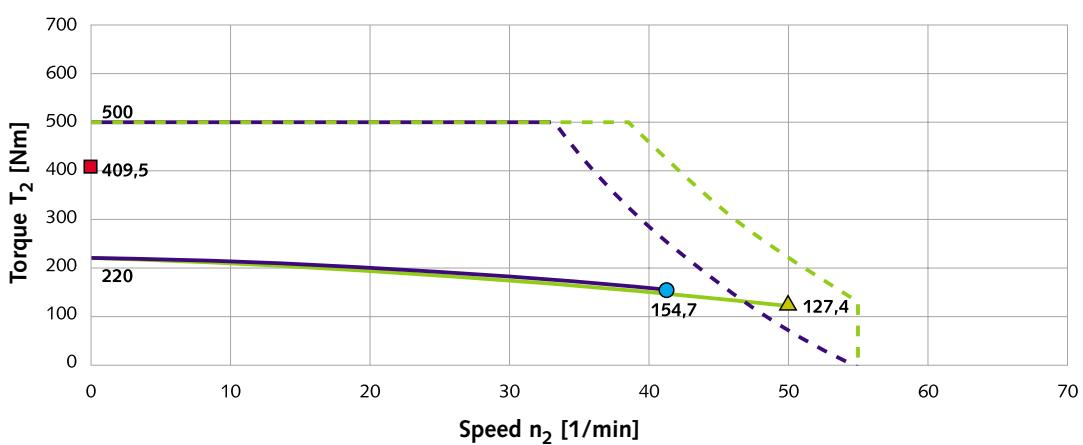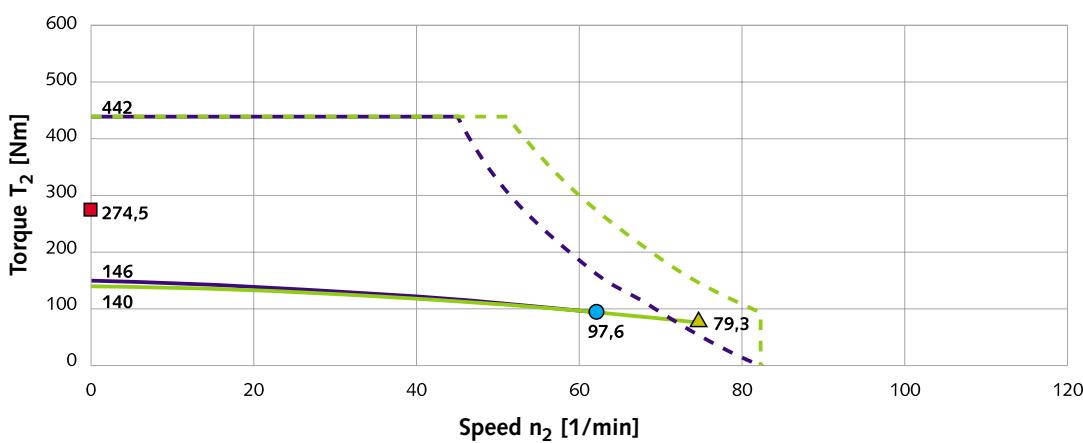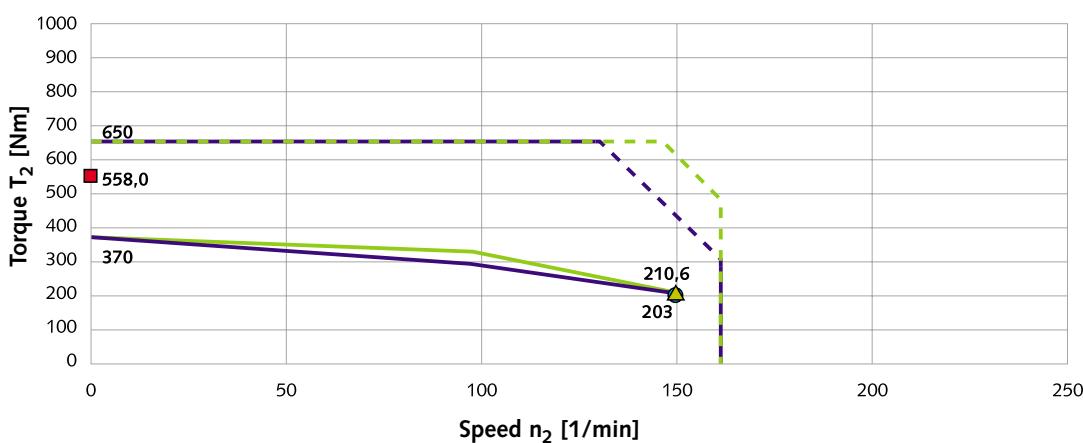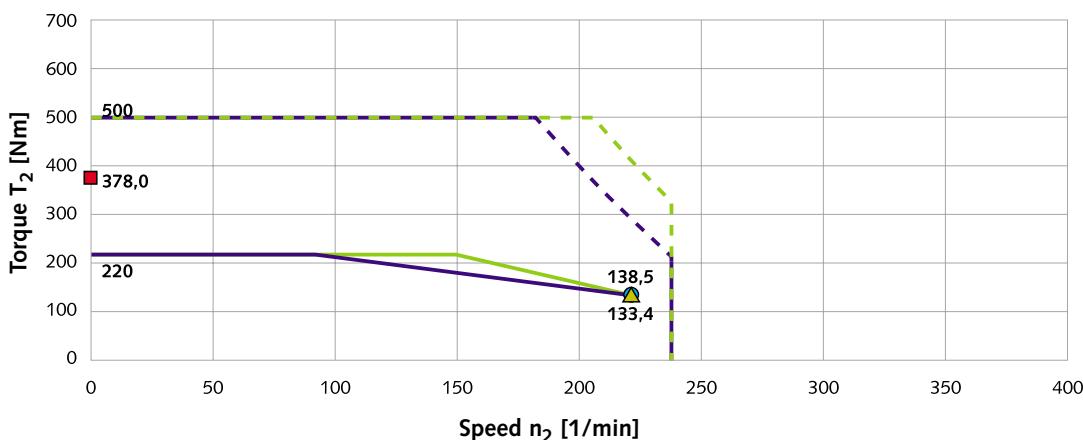

- - - Max. output torque 320V DC
- Nominal torque 320V DC
- - - Max. output torque 600V DC
- Nominal torque 600V DC
- Holding torque: brake
- Nominal point 320V DC
- ▲ Nominal point 600V DC


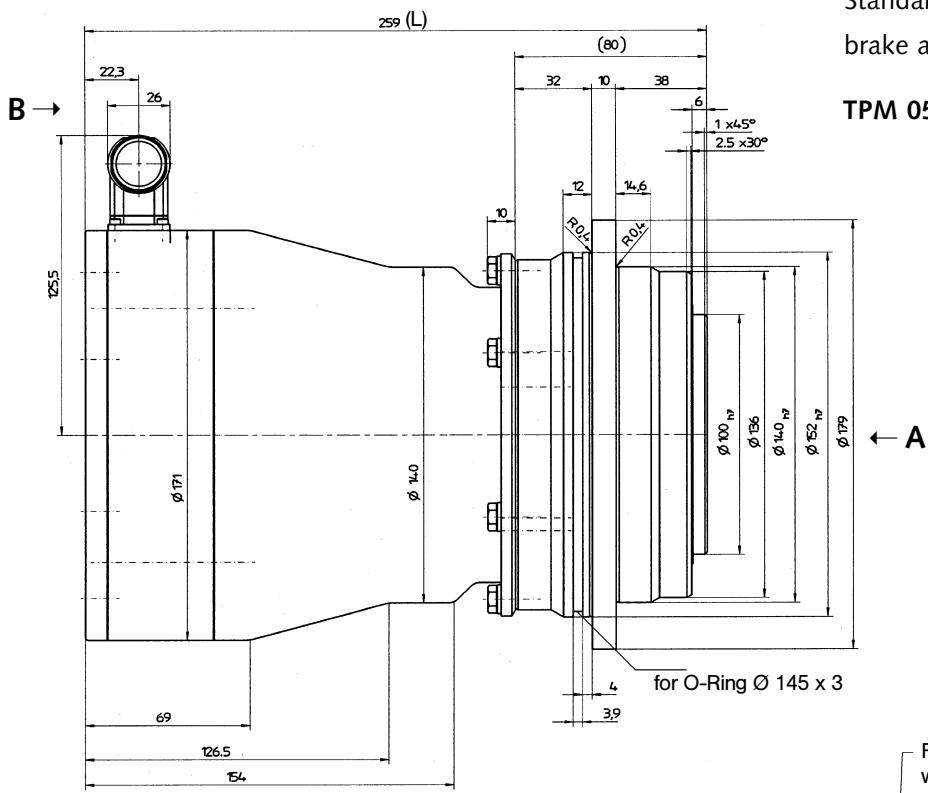


Standard version with resolver **without**
brake at $i = 21/31$

TPM 050...R....OH.-060

View A

Flange according to ISO9409
with additional thread

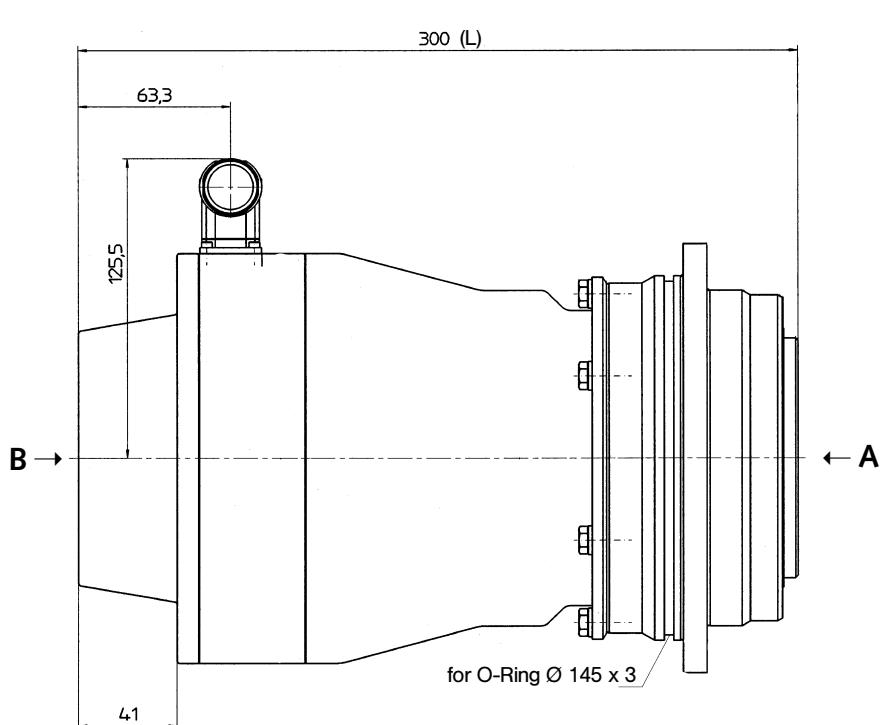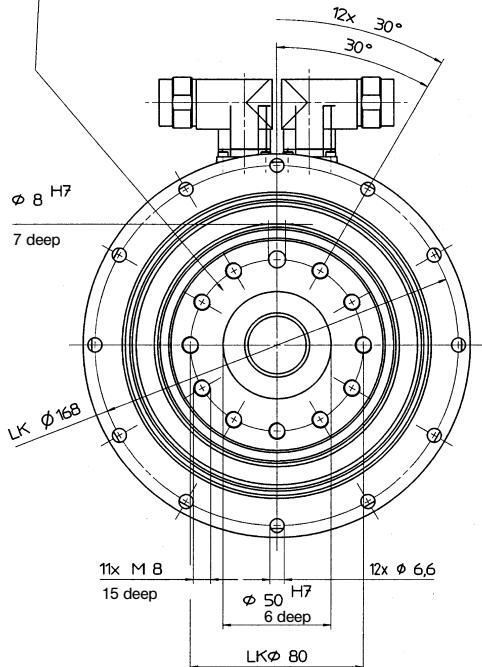


Standard version with resolver **with**
brake at $i = 21/31$

TPM 050...R....BP.-060




Standard version with resolver **without**
brake at i=61/91

TPM 050-...R-....-OH.-015

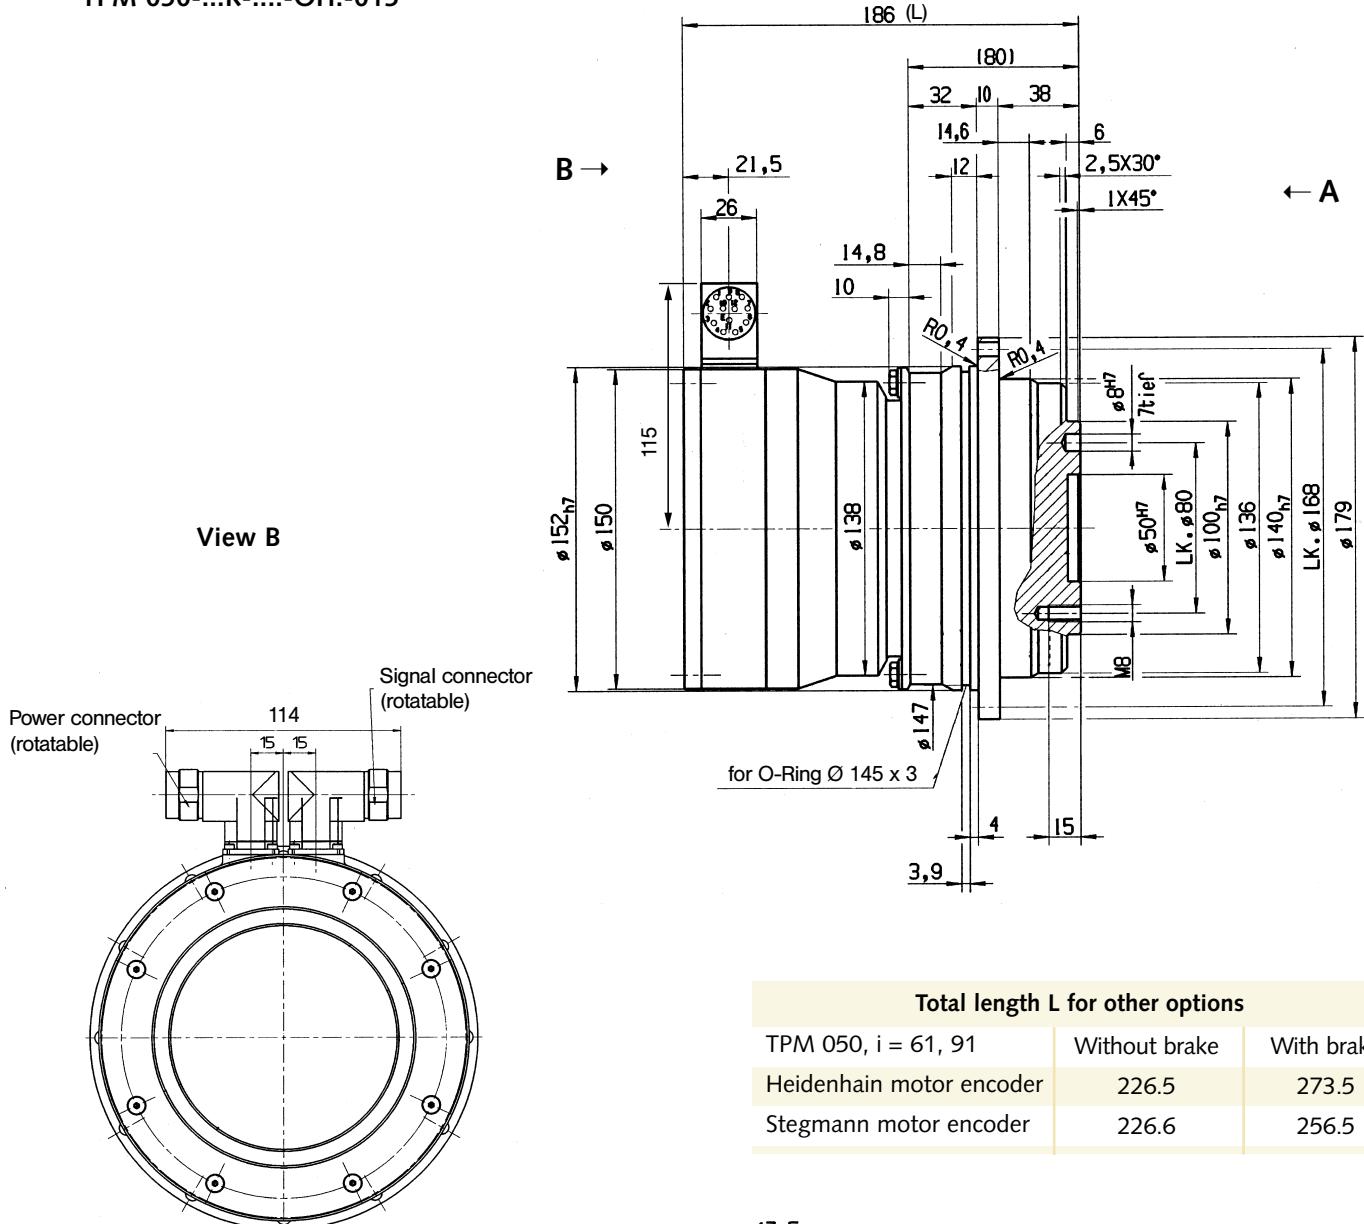

Total length L for other options

TPM 050, i = 61, 91	Without brake	With brake
Heidenhain motor encoder	226.5	273.5
Stegmann motor encoder	226.6	256.5

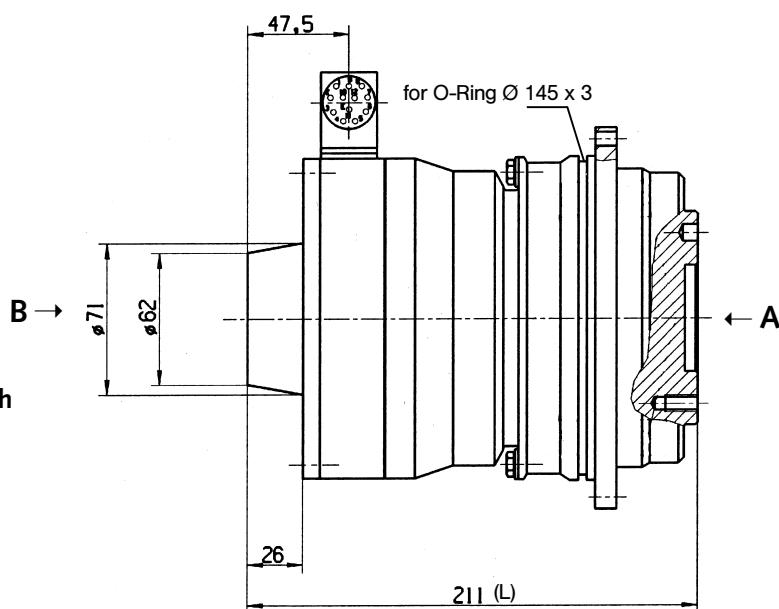

Standard version with resolver **with**
brake at i=61/91

TPM 050-...R-....-BP.-015



TPM 110 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i				21, 31, 61, 91
Max. acceleration torque ¹⁾	T _{2B}	Nm	i = 31 i = 21 / i = 61, 91	1,600 1,100 / 1,300	
Emergency Stop torque ²⁾	T _{2Not}	Nm			2,750
Nominal output torque	T _{2N}	Nm	i = 31 i = 61, 91 i = 21	1,230 700 640	
Max. input speed	n _{1Max}	min ⁻¹			4,500
Nominal input speed ³⁾	n _{1N}	min ⁻¹			3,500
Torsional backlash	j _t	arcmin	Standard Reduced		≤ 3 ≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin			300
Max. axial force ⁴⁾	F _{2AMax}	N			10,050
Max. tilting torque	M _{2TiltMax}	Nm			3,064
Tilting rigidity	C _{2K}	Nm/arcmin			1,452
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm	i = 31 i = 91	2.8 2.0	
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 21 i = 31 i = 61 i = 91	1.72 1.16 0.27 0.20	

Motor data

			i = 21, 31		i = 61, 91	
DC bus voltage	U _D	VDC	320	600	320	600
Peak torque ⁶⁾	M _{Max}	Nm	39.60	39.70	30.50	32.60
Continuous stall torque	M ₀	Nm	17.70	17.80	13.60	13.60
Nominal torque	M _N	Nm	12.80	13.80	6.60	4.90
Peak current ⁶⁾	I _{Max}	A	58.00	26.20	75.00	54.00
Nominal current	I _N	A	13.50	9.70	12.40	5.60
No-load speed ⁶⁾	n ₀	min ⁻¹	3,700	4,326	6,380	7,180
Nominal speed ⁶⁾	n _N	min ⁻¹	2,875	3,300	5,375	6,000
Max. power	P _{Max}	kW	8.30	11.30	11.18	13.00
Moment of inertia with resolver	J _{Mot.}	kgcm ²	11.95		9.68	

General data

Protection class		IP64
Operating temperature range	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	37.1/39.6 at i = 21/31 35.9/38.3 at i = 61/91
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour

2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature


4) Based on the flange center


5) At 20°C gearhead temperature

6) Limit motor values to maximum values of the gearhead



The maximum and nominal values of the gearhead can limit the output values in some circumstances.

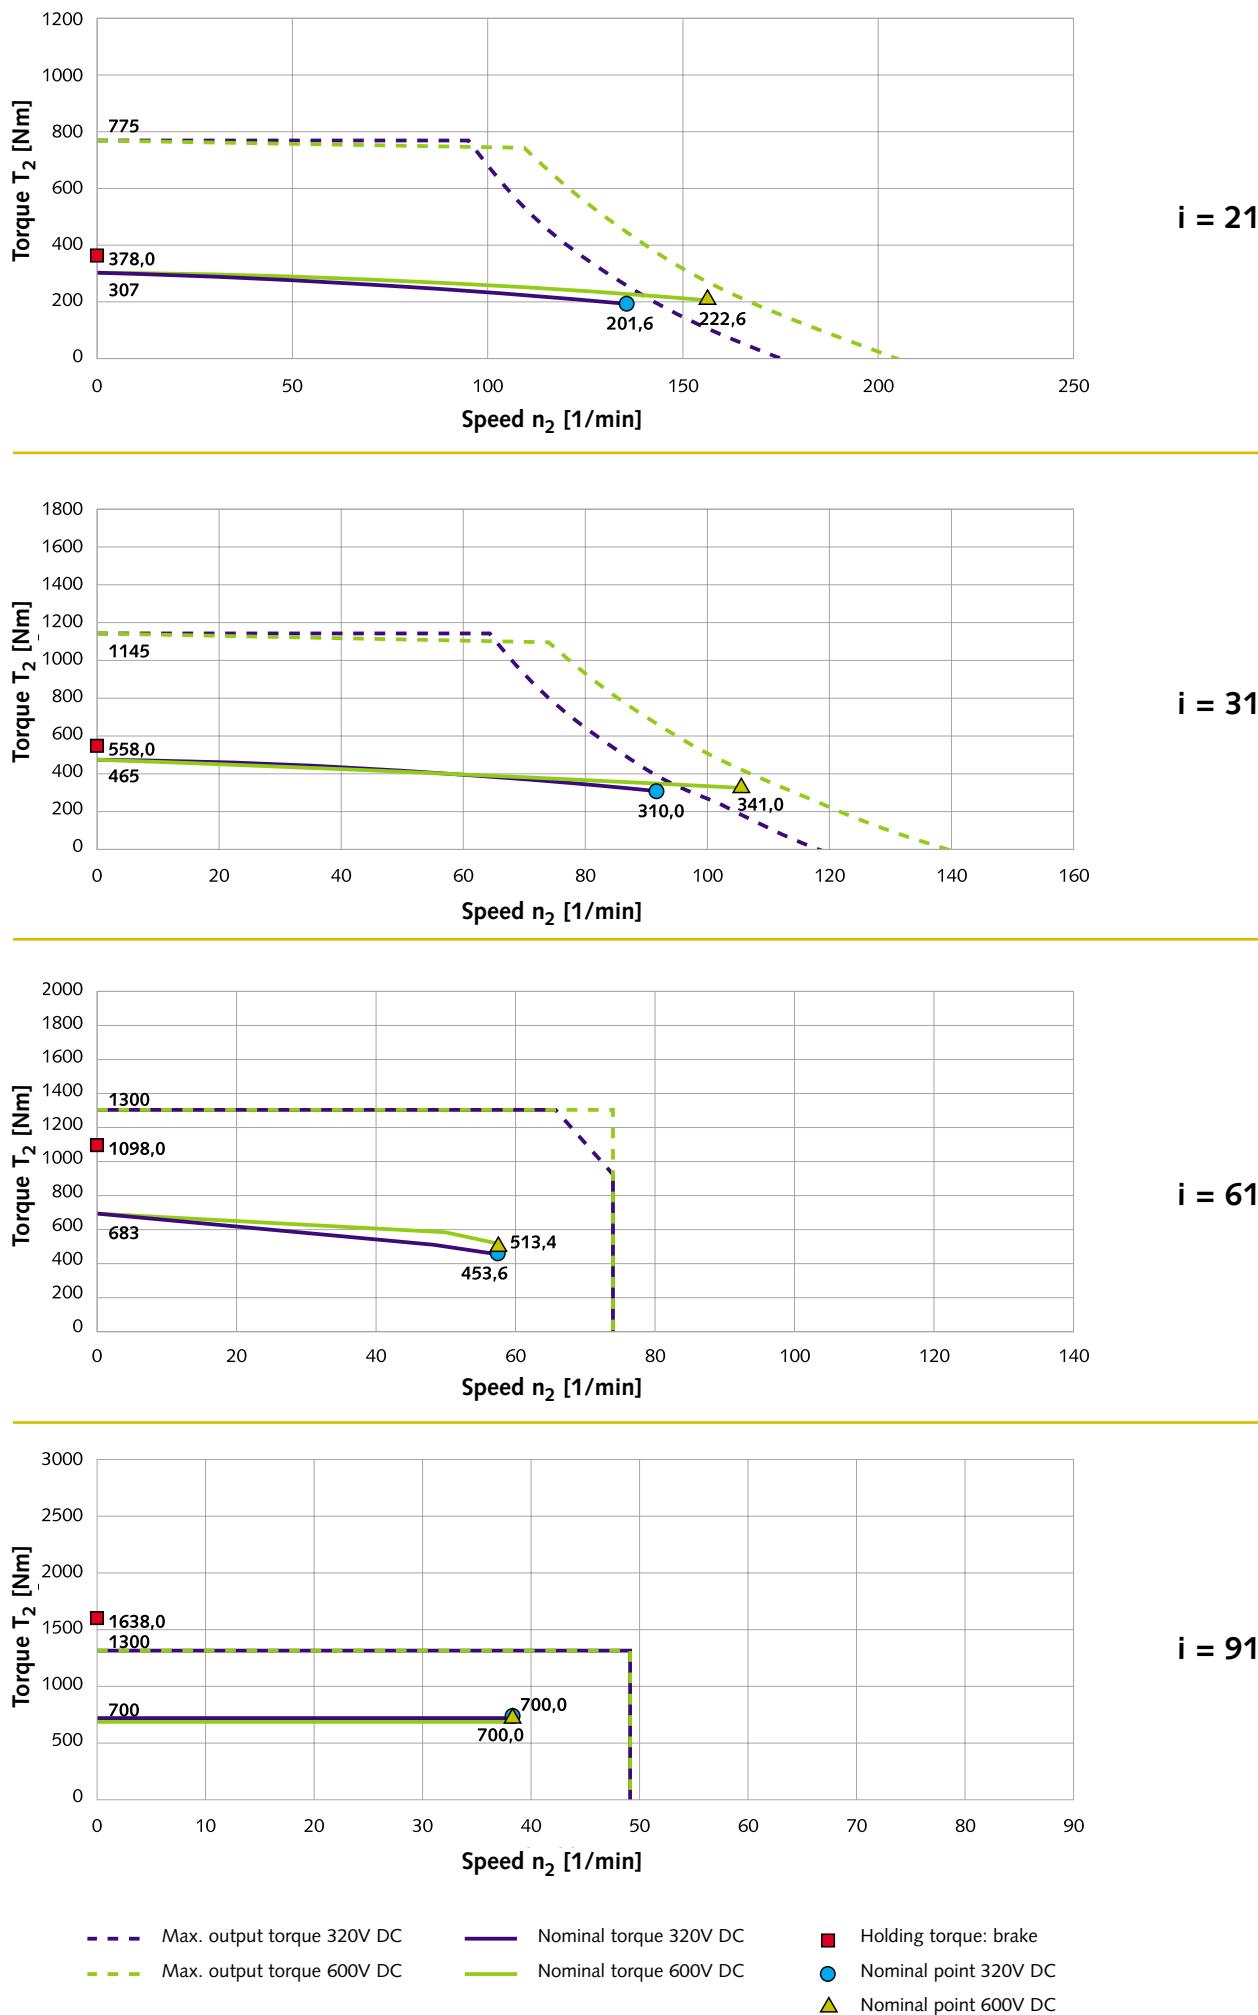


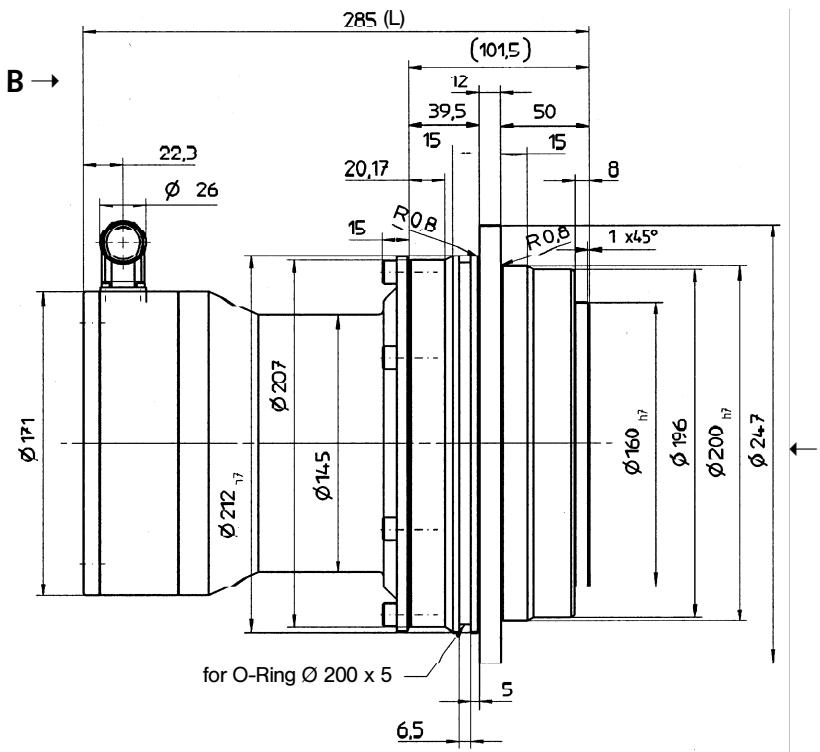


Standard version with resolver **without**
brake at $i = 21/31$

TPM 110-...R-....-OH.-075

View A

Total length L for other options		
TPM 110, i = 21, 31	Without brake	With brake
Heidenhain motor encoder	326	390
Stegmann motor encoder	300	372

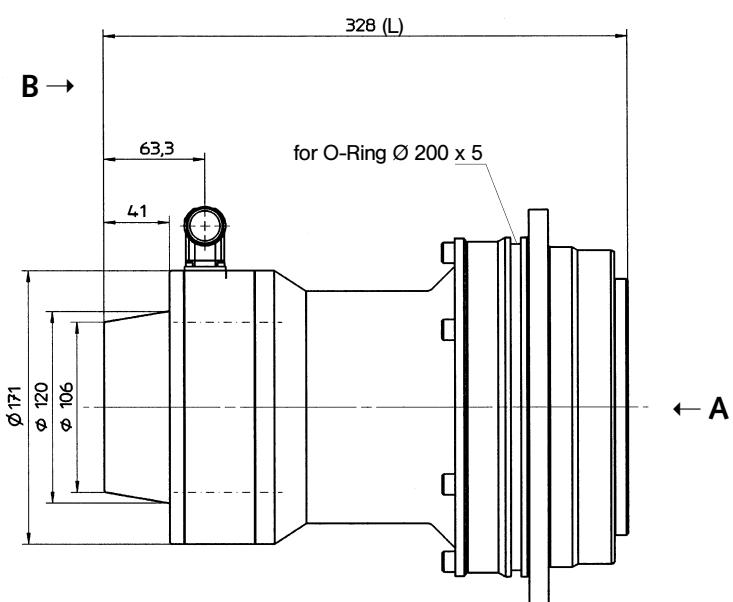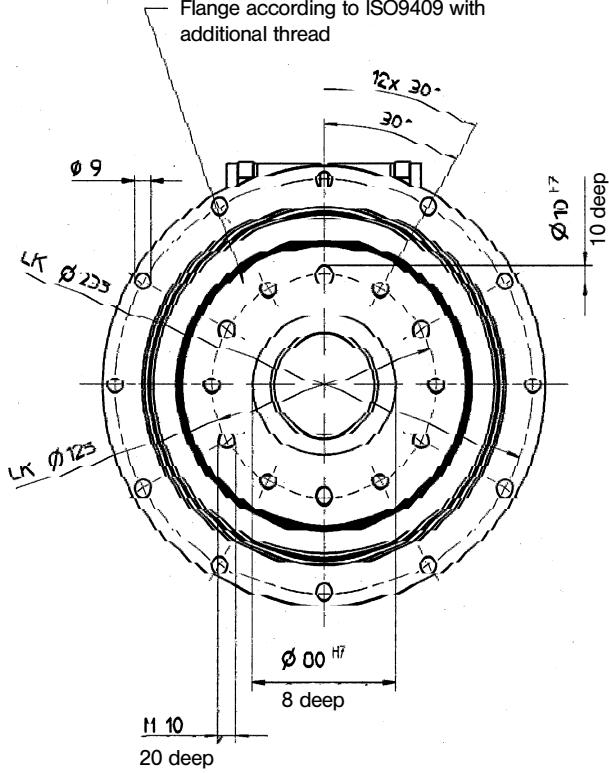


Standard version with resolver **with**
brake at $i = 21/31$

TPM 110-...R-....-BP-075




Standard version with resolver **without**
brake at i=61/91

TPM 110-...R-....-OH.-060

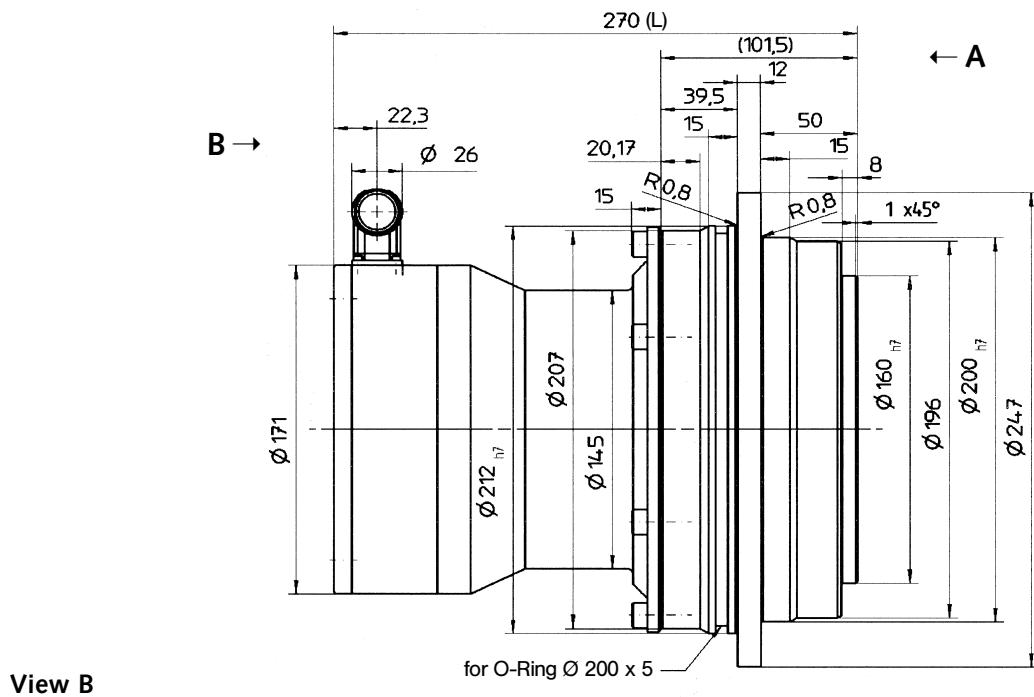


View B

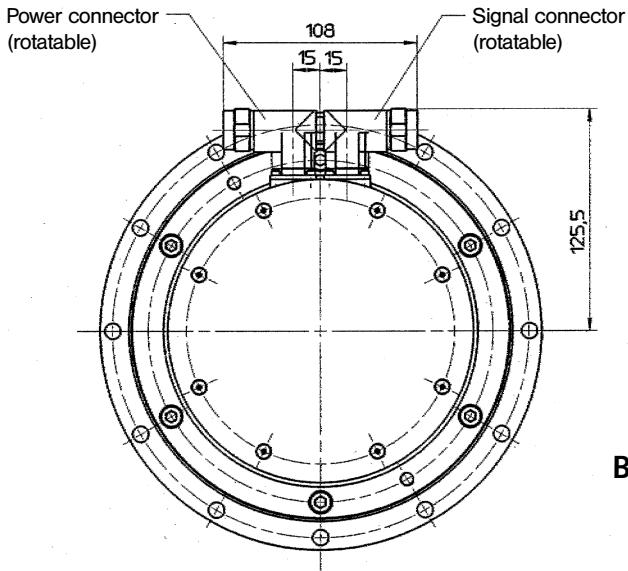

Total length L for other options

	Without brake	With brake
TPM 110, i = 61, 91	311	375
Heidenhain motor encoder	285	357
Stegmann motor encoder		

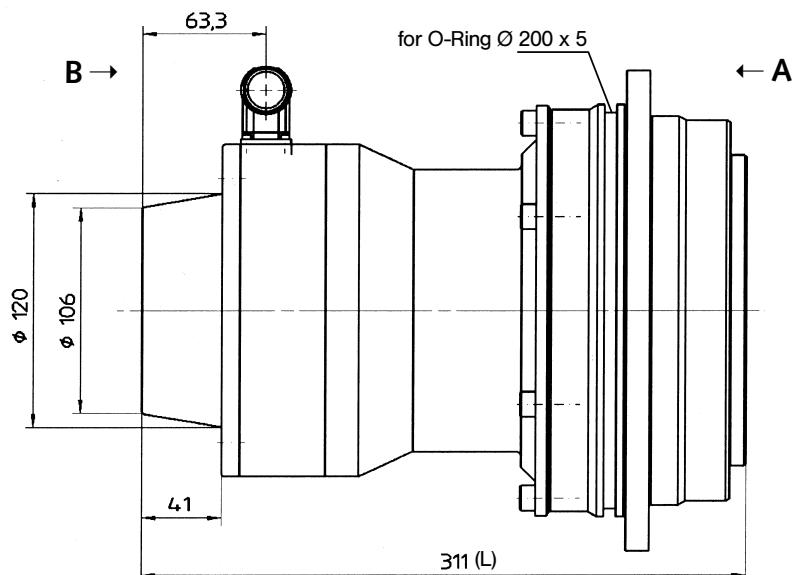

Standard version with resolver **with**
brake at i=61/91

TPM 110-...R-....-BP-060



TPMA 025 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i			110, 220
Max. acceleration torque ¹⁾	T _{2B}	Nm		480
Emergency Stop torque ²⁾	T _{2Not}	Nm		1,200
Nominal output torque	T _{2N}	Nm		260
Max. input speed	n _{1Max}	min ⁻¹		6,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹		3,200
Torsional backlash	j _t	arcmin		≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin		97
Max. axial force ⁴⁾	F _{2AMax}	N		4,150
Max. tilting torque	M _{2TiltMax}	Nm		413
Tilting rigidity	C _{2K}	Nm/arcmin		550
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm		0.4
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 110 i = 220	0.036 0.009

Motor data

i = 110, 220				
DC bus voltage	U _D	VDC	320	600
Peak torque ⁶⁾	M _{Max}	Nm	4.20	4.20
Continuous stall torque	M ₀	Nm	1.70	1.70
Nominal torque	M _N	Nm	1.40	1.30
Peak current ⁶⁾	I _{Max}	A	10.80	7.00
Nominal current	I _N	A	3.10	1.80
No-load speed ⁶⁾	n ₀	min ⁻¹	7,300	7,800
Nominal speed ⁶⁾	n _N	min ⁻¹	5,625	6,200
Max. power	P _{Max}	kW	1.72	1.85
Moment of inertia with resolver	J _{Mot.}	kgcm ²	0.86	

General data

Protection class		IP64
Operating temperature range	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 65
Weight without/with brake	kg	8.4/9.3
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour



2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature

4) Based on the flange center

5) At 20°C gearhead temperature



6) Limit motor values to maximum values of the gearhead

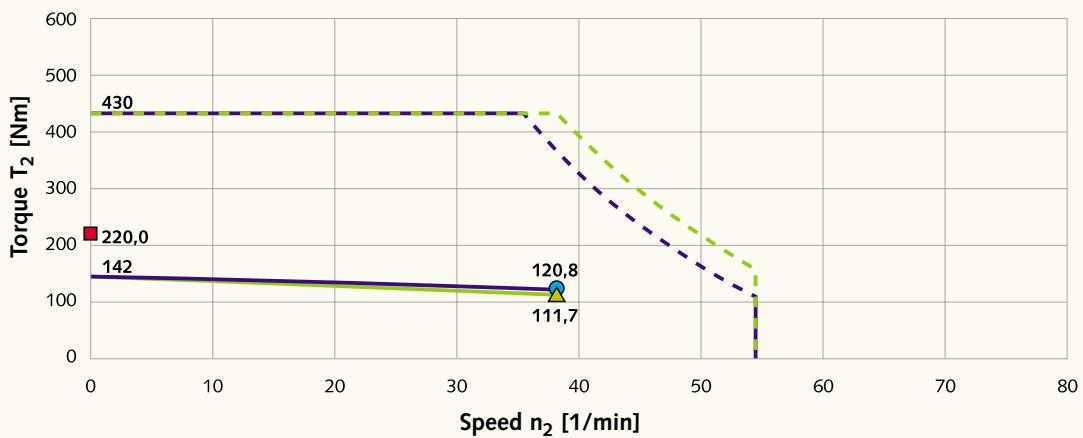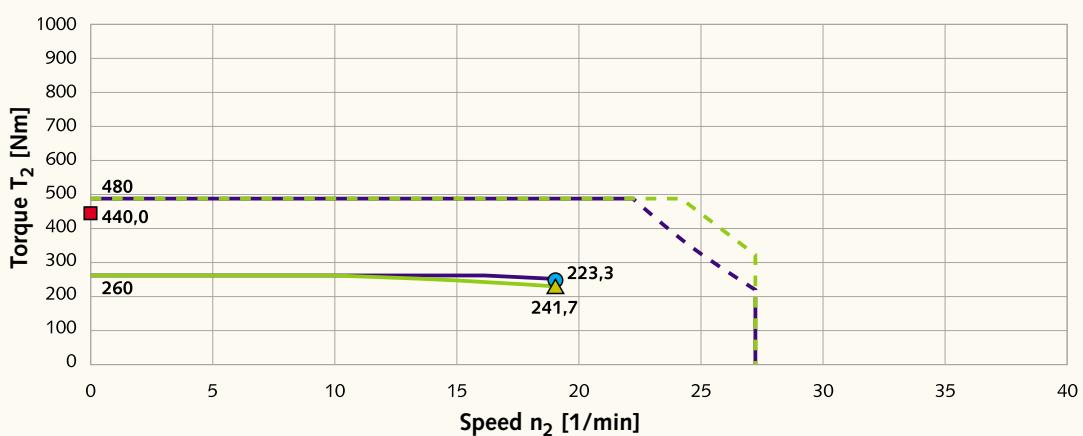**i = 110****i = 220**

— Max. output torque 320V DC
 - - Nominal torque 320V DC

— Nominal torque 600V DC
 - - Max. output torque 600V DC

■ Holding torque: brake
 ● Nominal point 320V DC
 ▲ Nominal point 600V DC

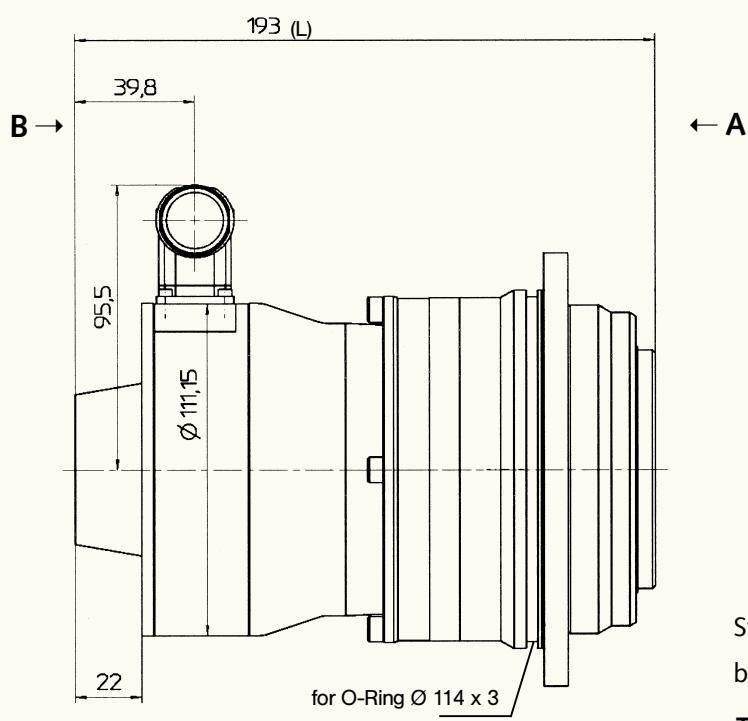
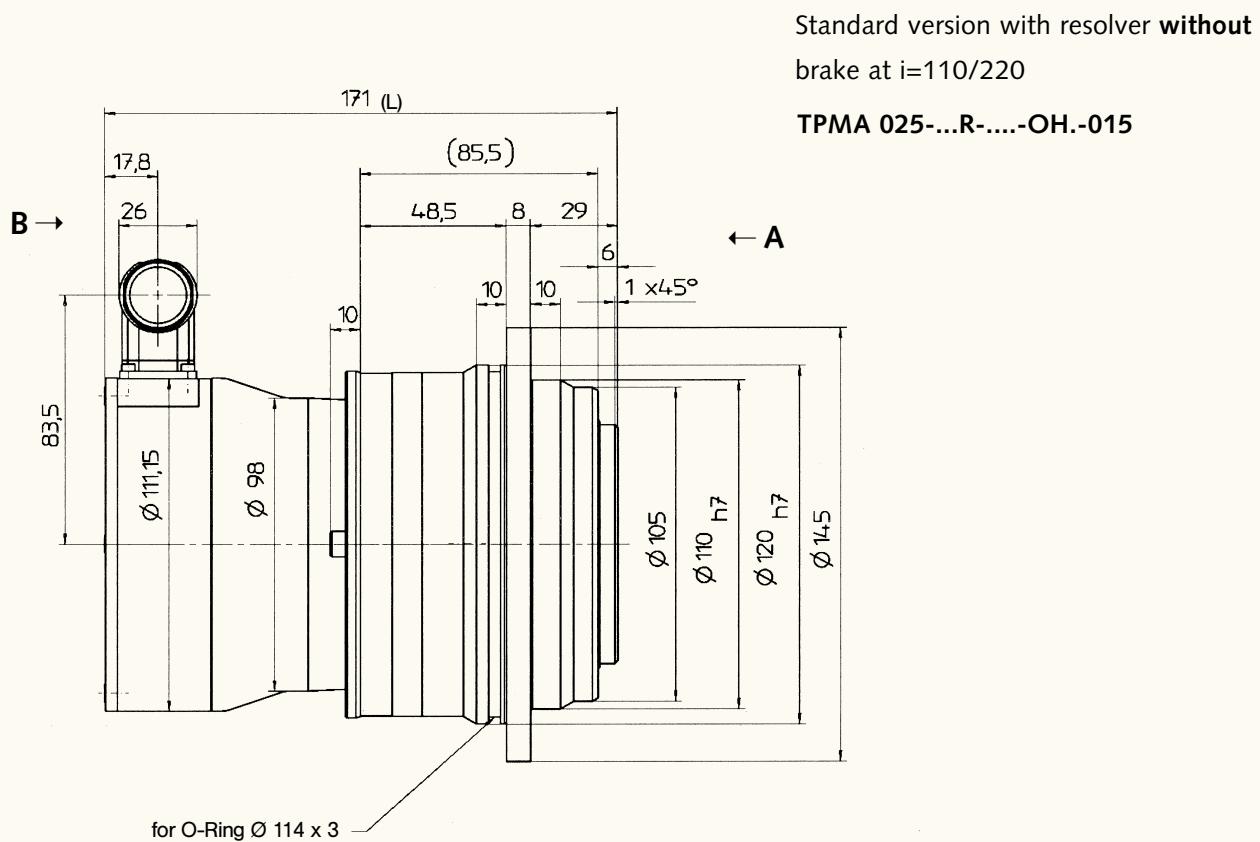


Standard version with resolver **with**
brake at i=110/220

TPMA 025-...R-....-BP.-015


Total length L for other options

TPMA 025, i = 110, 220	Without brake	With brake
Heidenhain motor encoder	217	258.6
Stegmann motor encoder	213	241.6

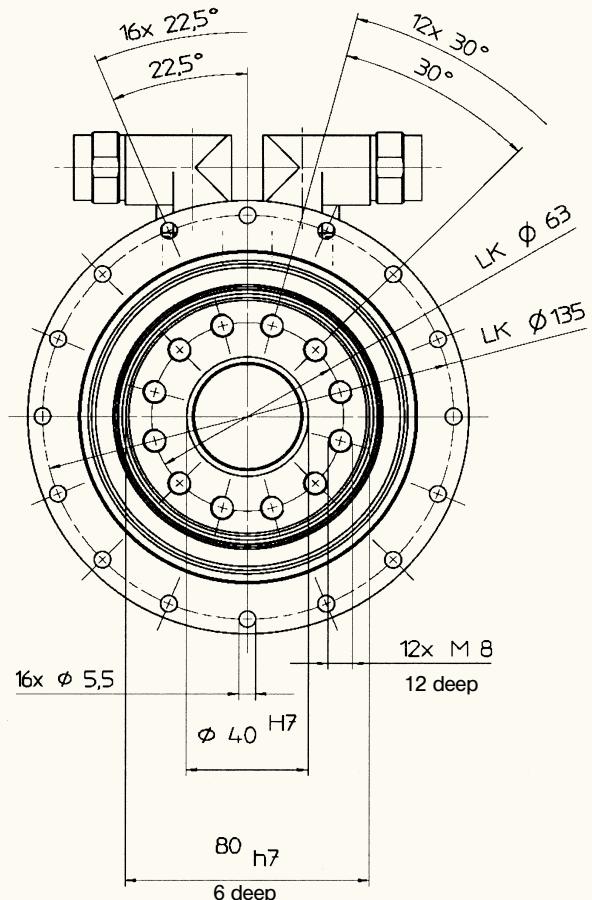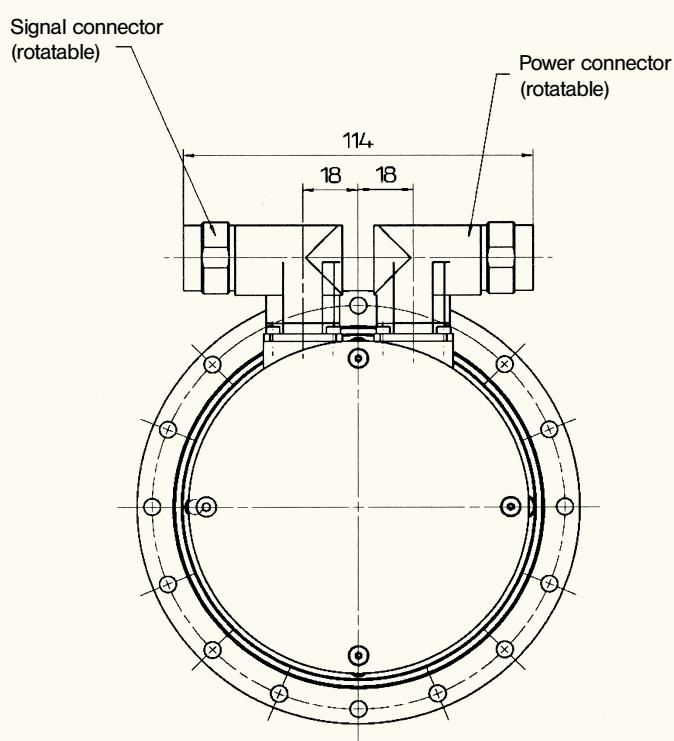View A**View B**



TPMA 050 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i			110, 220
Max. acceleration torque ¹⁾	T _{2B}	Nm		950
Emergency Stop torque ²⁾	T _{2Not}	Nm		2,375
Nominal output torque	T _{2N}	Nm		675
Max. input speed	n _{1Max}	min ⁻¹		5,000
Nominal input speed ³⁾	n _{1N}	min ⁻¹		2,600
Torsional backlash	j _t	arcmin		≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin		186
Max. axial force ⁴⁾	F _{2AMax}	N		6,130
Max. tilting torque	M _{2TiltMax}	Nm		1,295
Tilting rigidity	C _{2K}	Nm/arcmin		560
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm		0.8
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 110 i = 220	2.43 2.31

Motor data

i = 110, 220				
DC bus voltage	U _D	VDC	320	600
Peak torque ⁶⁾	M _{Max}	Nm	7.80	7.80
Continuous stall torque	M ₀	Nm	3.60	3.50
Nominal torque	M _N	Nm	2.80	2.50
Peak current ⁶⁾	I _{Max}	A	19.60	13.70
Nominal current	I _N	A	4.20	2.60
No-load speed ⁶⁾	n ₀	min ⁻¹	5,000	5,900
Nominal speed ⁶⁾	n _N	min ⁻¹	3,775	4,562
Max. power	P _{Max}	kW	2.25	2.53
Moment of inertia with resolver	J _{Mot.}	kgcm ²	2.28	

General data

Protection class		IP64
Operating temperature range	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 70
Weight without/with brake	kg	17.6/18.8
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour



2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature

4) Based on the flange center

5) At 20°C gearhead temperature

6) Limit motor values to maximum values of the gearhead

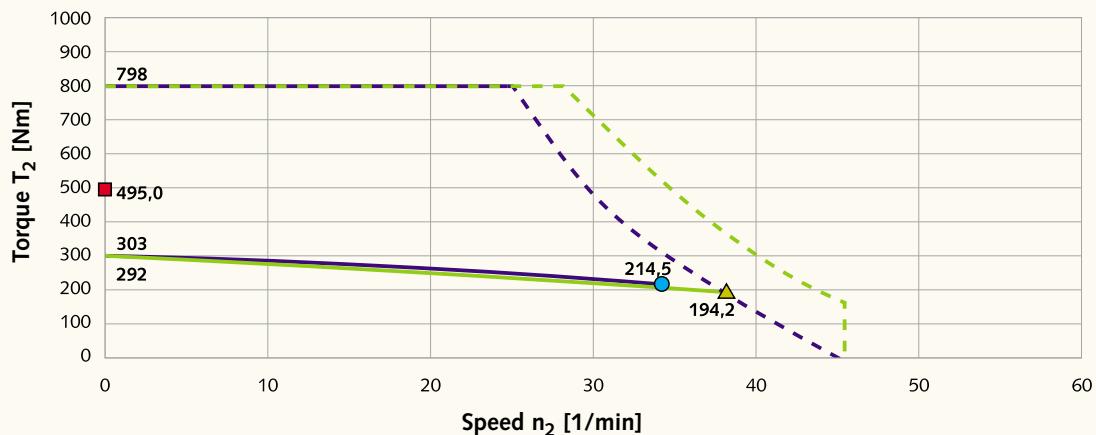
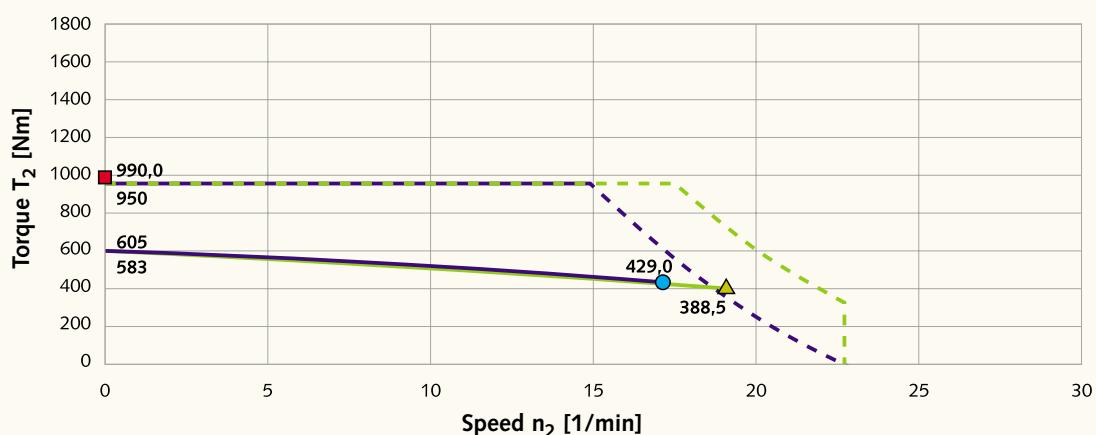
**i = 110****i = 220**

- - - Max. output torque 320V DC
- - - Max. output torque 600V DC
- Nominal torque 320V DC
- Nominal torque 600V DC
- Holding torque: brake
- Nominal point 320V DC
- ▲ Nominal point 600V DC



Standard version with resolver **without**
brake at i=110/220

TPMA 050-...R-....-OH.-015

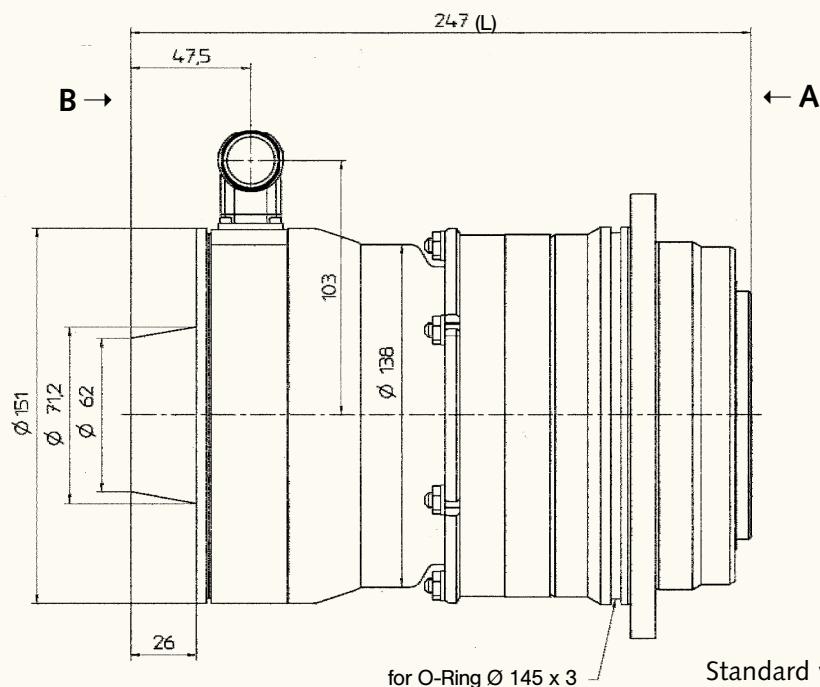
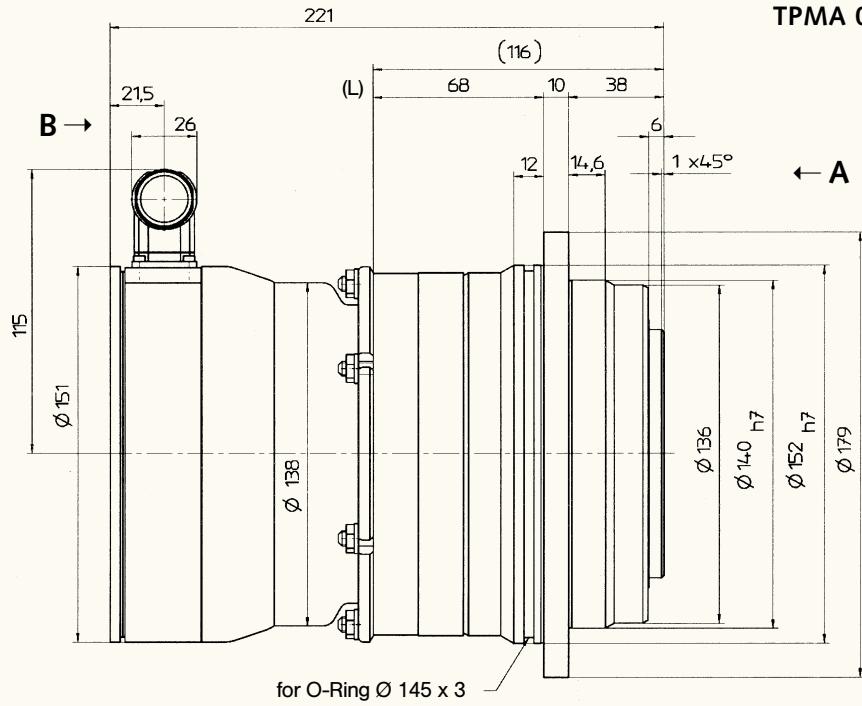


Standard version with resolver **with**
brake at i=110/220

TPMA 050-...R-....-OH.-015


Total length L for other options

TPMA 050, i = 110, 220	Without brake	With brake
Heidenhain motor encoder	263	310
Stegmann motor encoder	263	292

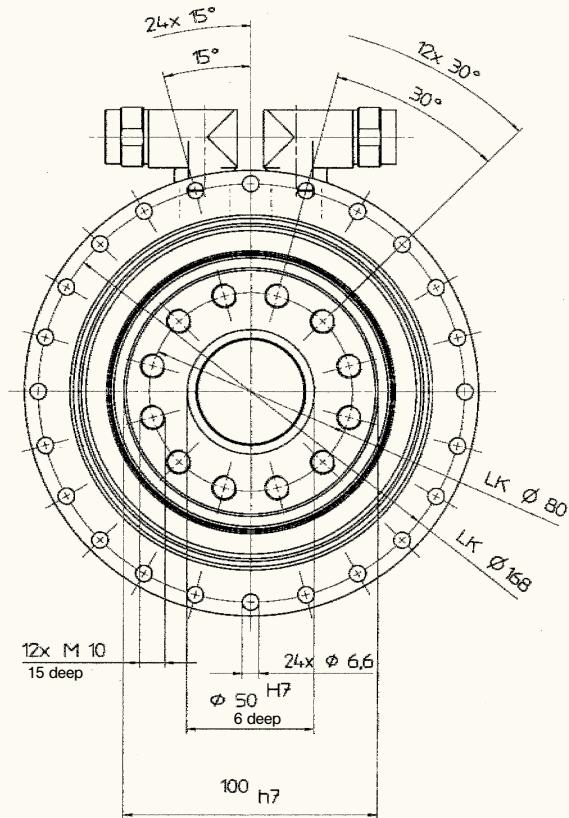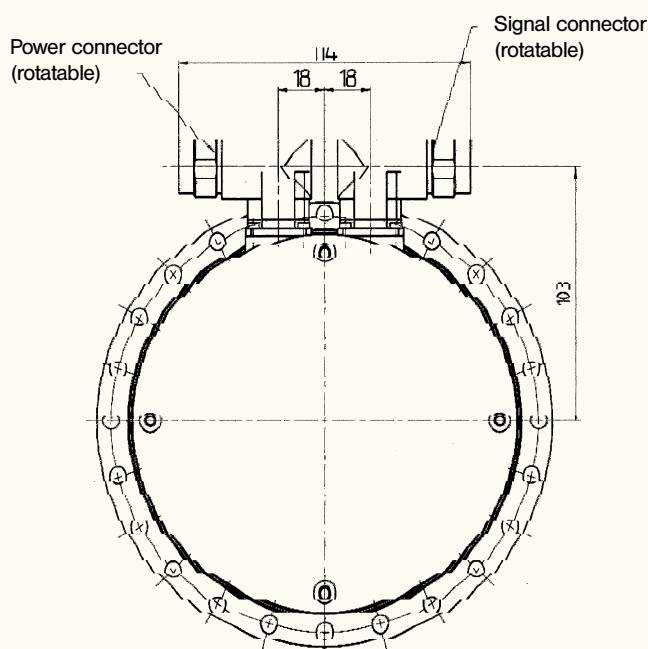View A**View B**



TPMA 110 - Technical data, characteristic curves and drawings

Gearhead data

Ratio	i			110, 220
Max. acceleration torque ¹⁾	T _{2B}	Nm		2,600
Emergency Stop torque ²⁾	T _{2Not}	Nm		6,500
Nominal output torque	T _{2N}	Nm		1,570
Max. input speed	n _{1Max}	min ⁻¹		4,500
Nominal input speed ³⁾	n _{1N}	min ⁻¹		2,100
Torsional backlash	j _t	arcmin		≤ 1
Torsional rigidity	C _{t21}	Nm/arcmin		550
Max. axial force ⁴⁾	F _{2AMax}	N		10,050
Max. tilting torque	M _{2TiltMax}	Nm		3,064
Tilting rigidity	C _{2K}	Nm/arcmin		1,452
No-load running torque (n ₁ = 3000 min ⁻¹) ⁵⁾	T ₀₁₂	Nm		1.70
Moment of inertia reflected to the input	J _{Gear}	kgcm ²	i = 110 i = 220	0.646 0.159

Motor data

i = 110, 220				
DC bus voltage	U _D	VDC	320	600
Peak torque ⁶⁾	M _{Max}	Nm	30.50	32.60
Continuous stall torque	M ₀	Nm	13.60	13.60
Nominal torque	M _N	Nm	6.60	4.90
Peak current ⁶⁾	I _{Max}	A	75.00	54.00
Nominal current	I _N	A	12.40	5.60
No-load speed ⁶⁾	n ₀	min ⁻¹	6,380	7,180
Nominal speed ⁶⁾	n _N	min ⁻¹	5,375	6,000
Max. power	P _{Max}	kW	11.18	13.00
Moment of inertia with resolver	J _{Mot.}	kgcm ²	9.68	

General data

Protection class		IP64
Operating temperature range	°C	-10 to +90
Mounting position		Any
Lubrication		Synthetic oil, ISO VG 220
Paint		RAL 5002 (Blue)
Noise level (n ₁ = 3000 min ⁻¹)	dB(A)	≤ 70
Weight without/with brake	kg	43.6/46.0
Direction of rotation		motor and gearhead in same direction
Insulation class		F

1) 1000 cycles per hour



2) Permissible 1000 times during the life span of the gearhead

3) At 20°C ambient temperature

4) Based on the flange center

5) At 20°C gearhead temperature

6) Limit motor values to maximum values of the gearhead

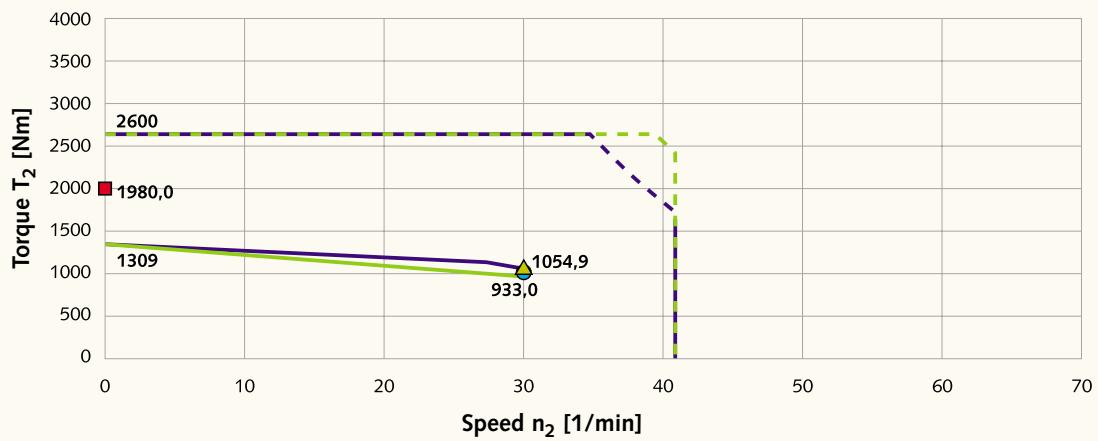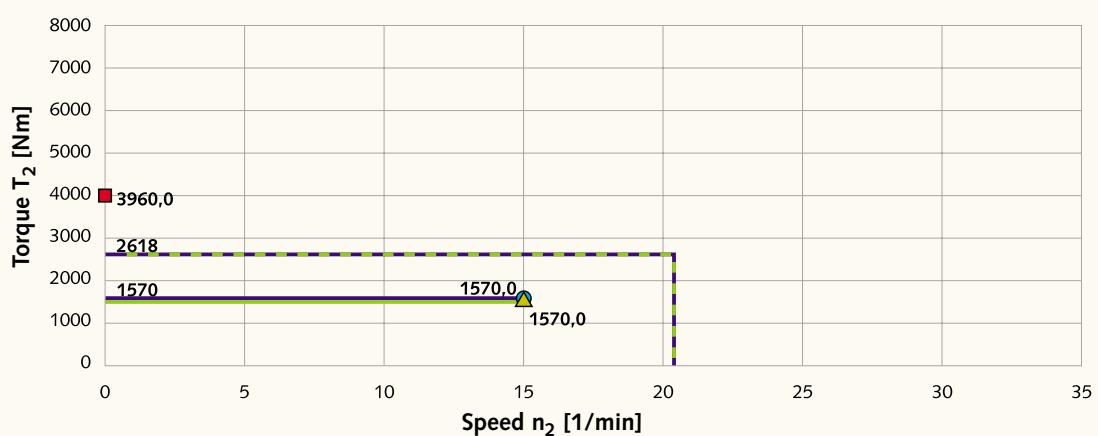**i = 110****i = 220**

- - - Max. output torque 320V DC
- - - Max. output torque 600V DC


— Nominal torque 320V DC
— Nominal torque 600V DC

■ Holding torque: brake
● Nominal point 320V DC
▲ Nominal point 600V DC




Standard version with resolver **without**
brake at i=110/220

TPMA 110-...R-....-OH.-060

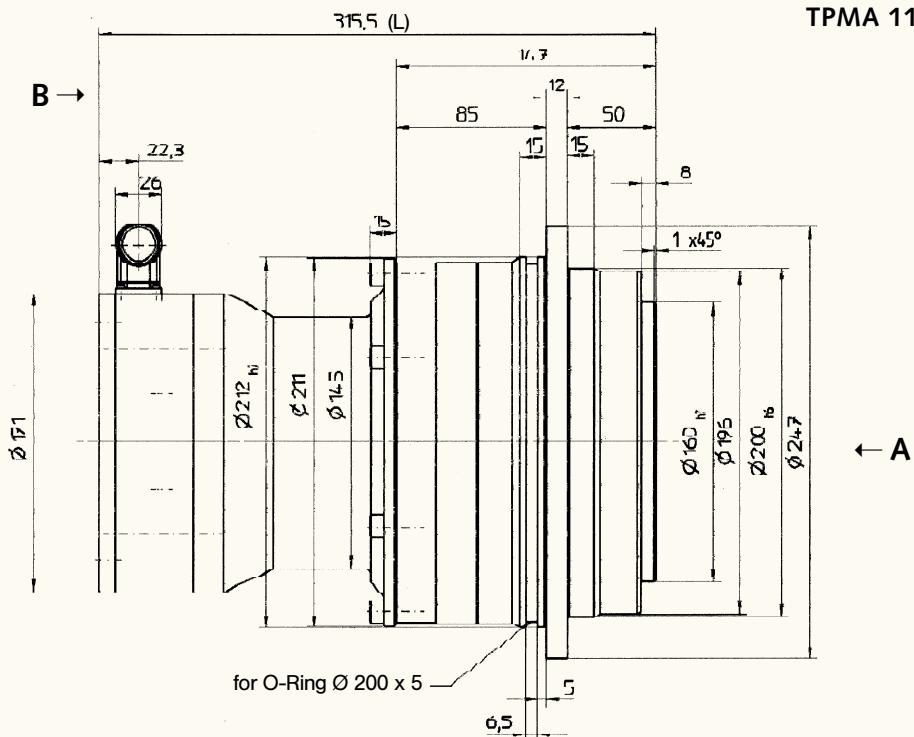



Standard version with resolver **with**
brake at i=110/220

TPMA 110-...R-....-BP.-060

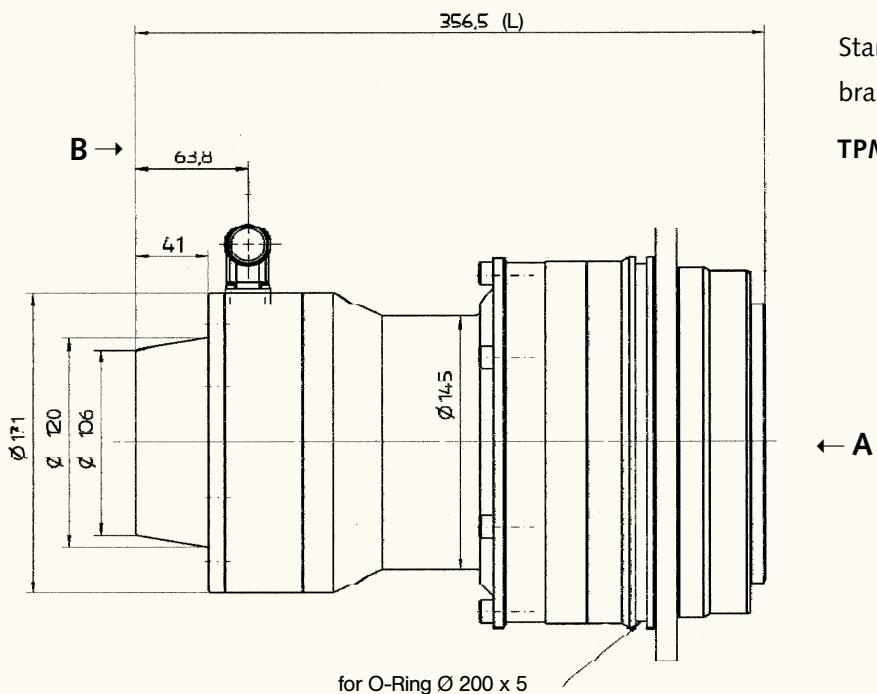


Total length L for other options

TPMA 110, i = 110, 220	Without brake	With brake
Heidenhain motor encoder	356.5	420.5
Stegmann motor encoder	330.5	402.5

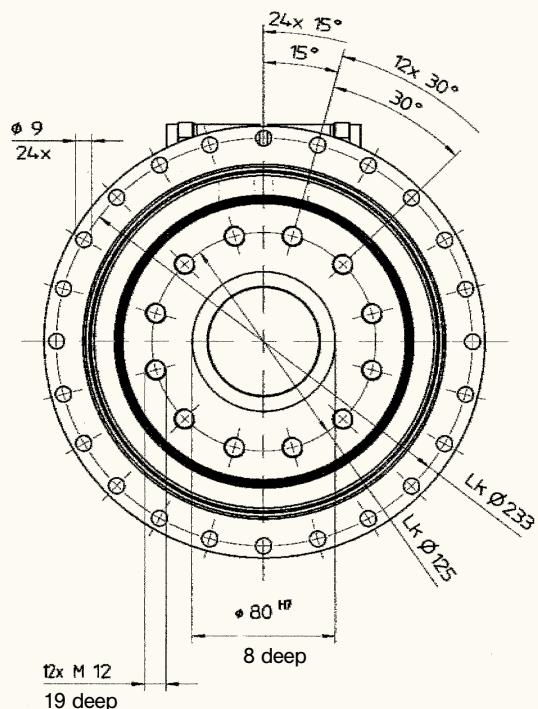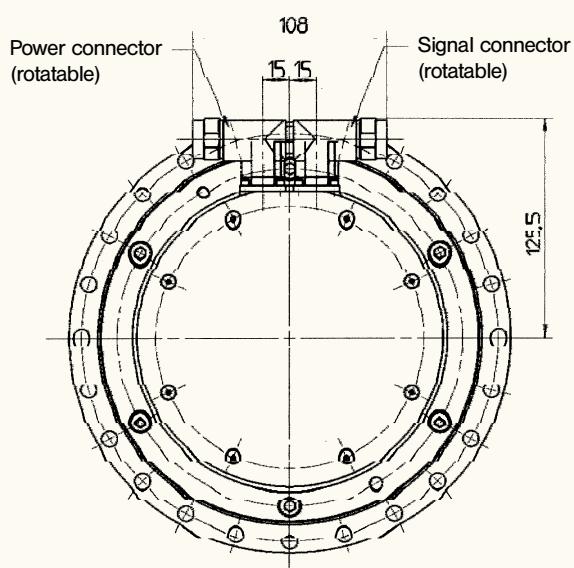View A**View B**

Options



Electrically-released holding brake

A compact permanent-magnet brake is available for holding the rotor when the power is off. It is characterized by backlash-free operation, drag-free when disengaged, unlimited ON time and constant torque at high operating temperatures.

Data		TPM 004 only with resolver	TPM 004	TPM 010, TPM(A) 025	TPM(A) 050 (i=61/91/110/220)	TPM(A) 110, TPM 050 (i=21/31)
Holding torque at 20°C	Nm		1	2	4.5	18
Holding torque at 100°C	Nm	0.4	0.8	1.8	4.0	15
Dynamic torque	Nm	-	0.8	1.7	3.8	15
Moment of inertia	kgcm ²	-	0.021	0.068	0.18	1.66
Weight	kg	0.01	0.11	0.15	0.30	0.9
Release/set time	ms	0.05	12/8	25/6	35/7	50/10
Coil resistance at 20°C	Ω	27/13	53-62	48-56	45-51	22-26
Supply voltage	V DC	96		24 +6% -10%		
Current	A	0.25	0.45	0.55	0.54	1.1

Temperature sensors

The following temperature sensors are available with various servo controllers. They measure temperature directly at the motor coil.

- PTC - Positive temperature coefficient thermistor
- KTY - Linear temperature coefficient thermistor
- NTC - Negative temperature coefficient thermistor

Feedback systems

Various feedback systems are available for position encoding.

A single turn brushless resolver feedback is standard for TPM. This robust feedback device is suitable for many applications with normal demands for smooth running and precision.

For higher technical demands, optical encoders are available from Heidenhain and Stegmann. Using the EnDat® and Hiperface® interfaces, position values as well as information regarding startup and drive data can be stored to and retrieved from the TPM.

See page 46 for the respective pin assignments.



Comparison of TPM feedback devices

Parameter	Unit	ERN1387	HEIDENHAIN ECN1313	EQN1325	STEGMANN SRS50/66K	STEGMANN SRM50/66K	Resolver
Encoder type	Incremental	Abs. Singleturn	Abs. Multiturn	Abs. Singleturn	Abs. Multiturn	Abs. Singleturn	Abs. Singleturn
Operating voltage	V	5	5	5	7 ... 12	7 ... 12	7 (10 kHz)
Data interface	-	EnDat	EnDat	Hiperface	Hiperface	-	-
Electronic type plate	-	✓	✓	✓	✓	-	-
Form of the incremental signals	~ 1 V _{SS}	~ 1 V _{SS}	~ 1 V _{SS}	~ 1 V _{SS}	~ 1 V _{SS}	-	-
Number of sin/cos periods per revolution	2048	2048	2048	1024	1024	1	-
Reference track available	✓	-	-	-	-	-	-
Absolute position when main power is on	✓ (within 1 revolution)	✓ (within 1 revolution)	✓ (within 1 revolution)	✓ (within 1 revolution)	✓ (within 1 revolution)	✓ (within 1 revolution)	✓ (within 1 revolution)
Absolute resolution	Pos./rev	1 Sin/Cos period	8192	8192	32768	32768	1 Sin/Cos period
Multiturn function	Rev.	-	✓	-	✓	-	-
Multiturn measuring range	-	-	4096	-	4096	-	-
Max. operating temperature	°C	120	115	115	115	115	150
Min. operating temperature	°C	-30	-30	-20	-20	-20	-55
Moment of inertia	10 ⁻² kgcm ²	2,6	2,6	1	1	1	TPM 004 0,2 TPM (A)010-050 3 TPM 110 23,4



Accessories



Cables

Matching signal and power cables for the tested servo controllers listed on page 45 are available.

Please supply the following data when you order:

- Complete TPM description
- Desired length of cable, in 5 meter increments.
- Exact type description of servo controller to be used

The cables have excellent quality:

- Suitable for cable tracks, because highly flexible wires in accordance with DIN VDE 0295, class 6
- Oil and fire proof
- Free of halogen, silicon and CFC

Mechanical characteristics:

Max. tensile strength	Static 50 N/mm ² conductor diameter Dynamic 20 N/mm ² conductor diameter
Max. permissible torsion	± 30°/m
Permissible operating temperature	Static: -50°C to +80°C Flexed: -20°C to +70°C
Min. permissible bending radius	10 x D (outer diameter of cable) *)
Number of bending cycles	5 million (at bending radius 10 x D)
Max. permissible acceleration	5 m/sec ²
Max. permissible speed	180 m/min

*		D	conductor diameter
Power cable	TPM 004 - TPM(A) 050 (i=61, 91, 110, 220) TPM 050 (i=21, 31), TPM(A) 110	12,2 mm 15,1 mm	4 x 1,5 mm ² + 2 x 0,75 mm ² 4 x 2,5 mm ² + 2 x 1 mm ²
Signal cable		10 mm	





Servo controller

The TPM/TPMA AC servo actuators can be operated with a wide variety of servo controllers. The subsequent table listed all tested controllers with information on the correct option choices, feedbacks, temperature sensor and DC bus voltage.

For a number of these, a written startup manual is available. It contains all relevant parameter settings of the respective manufacturer to ensure that the startup can be performed in the shortest possible time.

Manufacturer	Series/type	feedback device				Temperature sensor		DC bus voltage		Cannot be implemented with TPM ...
		Resolver	Incremental	EnDat interface	Hiperface interface	PTC	NTC	KTY 84-130	320V DC	
AMK ²⁾	AMKKASYN KU	x	-	x	x	x	-	-	x	x
Atlas Copco	DMC 2	x	-	-	-	x	-	-	x	x
Berger Lahr ²⁾	Twin Line	-	-	-	x	x	-	-	x	x
Bosch ²⁾	Servo Dyn D	x	-	x	-	-	x	-	-	x
B & R ²⁾	AcoPos	x	-	x	-	x	-	x	-	x
CT ¹⁾	UniDrive	x	-	-	x	x	-	-	-	x
ESR Pollmeier	Trio-/Mididrive Digital	x	-	x	x	x	-	-	x	x
Hauser Hannifin ²⁾	Compx	x	-	-	x	x	-	x	x	x
Bosch Rexroth	Ecodrive 03	x	-	x	-	x	-	-	x	x
(Indramat) ¹⁾	Ecodrive 03, 16A	x	-	-	-	x	-	-	x	x
	DIAX 04	x	-	x	-	x	-	-	x	x
KEB ¹⁾	Combivert S4	x	x	-	-	x	-	-	x	x
Lenze ¹⁾	Global Drive 93xx	x	-	-	x	x	-	x	-	x
Nord ²⁾	SK 1000 E	x	-	-	-	-	-	x	-	x
Danaher Motion ¹⁾ (Seidel Kollmorgen)	Servostar 600/400	x	-	x	x	x	-	-	x	x
Siemens ¹⁾	SimoDrive 611U	x	x	x	-	-	-	x	-	x
	SimoDrive 611D/840D	-	x	x	-	-	-	x	-	x
	Master Drive MC	x	x	x	-	x	-	x	-	x
S.B.C. ²⁾	HPD	x	-	-	-	x	-	-	x	x
	LVD	x	-	-	-	x	-	-	x	-

Information on additional controllers can be supplied on request.

x = possible



- = not available

1) = Startup manual available



2) = Startup manual in preparation

Plug connections



Resolver, Singleturn

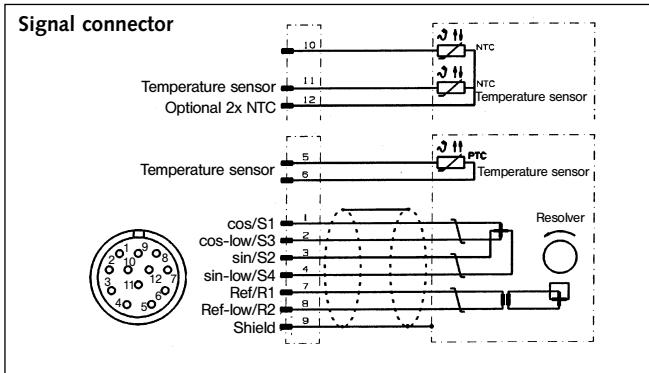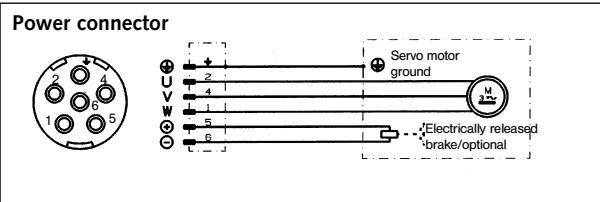



Stegmann encoder, Single and Multiturn Hiperface®

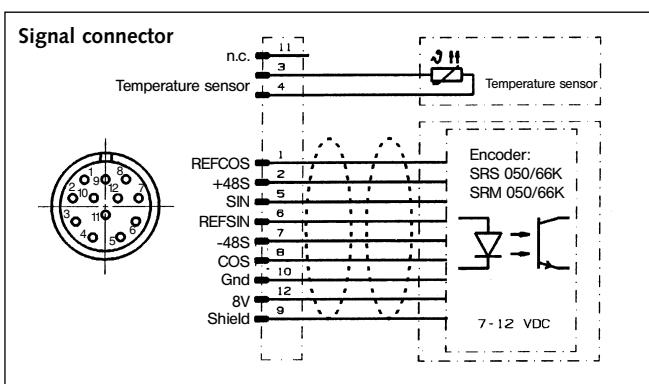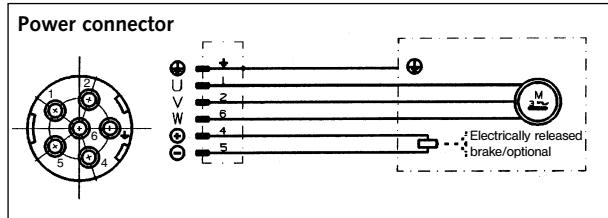

Heidenhain encoder, Single- and Multiturn EnDat®

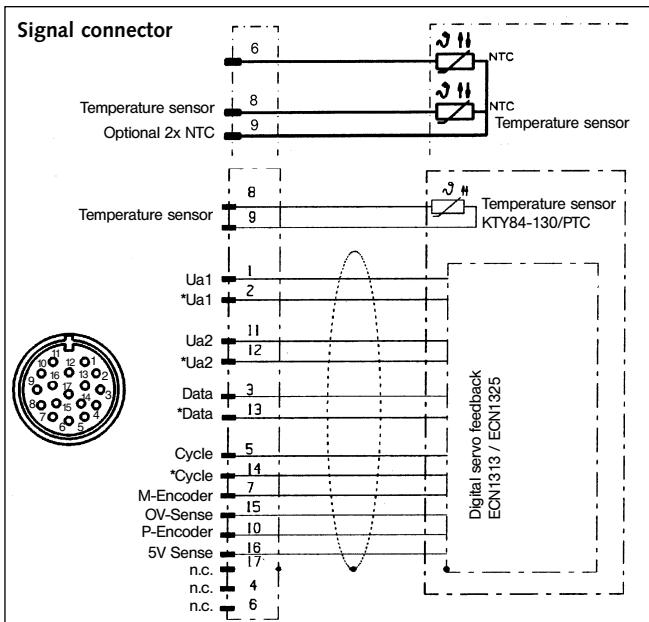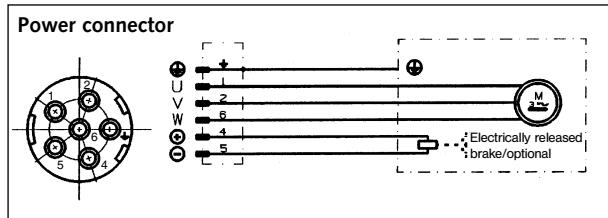

Heidenhain encoder, incremental

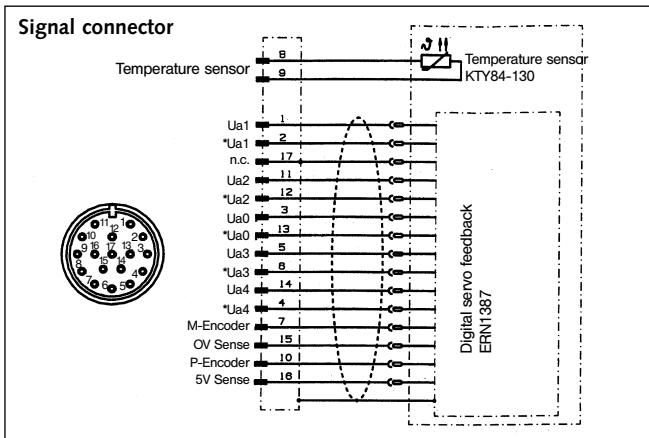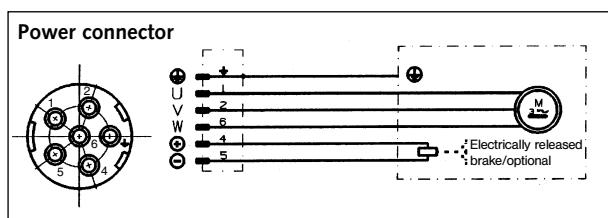

Ordering codes

TPM 025 - 021M - 600K - BP1

Size

TPM 004 / 010 / 025 / 050 / 110
TPMA 025 / 050 / 110

Ratio

21 / 31 / 61 / 91 (TPM)
110 / 220 (TPMA)

Motor encoder

R = Resolver
S = Singleturn absolute encoder EnDat®
M = Multiturn absolute encoder EnDat®
N = Singleturn absolute encoder Hiperface®
K = Multiturn absolute encoder Hiperface®
I = Incremental encoder

Backlash

1 = Standard < 3 (5) arcmin
0 = Reduced < 1 (3) arcmin
(values in brackets: TPM 004)

Brakes

BP = Permanent magnet brake
OH = Without brake

Temperature sensor

P = PTC
N = NTC
K = KTY 84-130

DC bus voltage

320 = 320V DC at controller input
voltage 1x230V/3x230V AC
600 = 600V DC at controller input
voltage 3x400V AC

Additional options without codes

- Straight plug connections
- Painted in RAL 9005 (black)
- Synthetic oil, ISO PG68
- UL approbation
- Explosionproof model (on request)

